


DEVIATORE DI FLUSSO 3 VIE

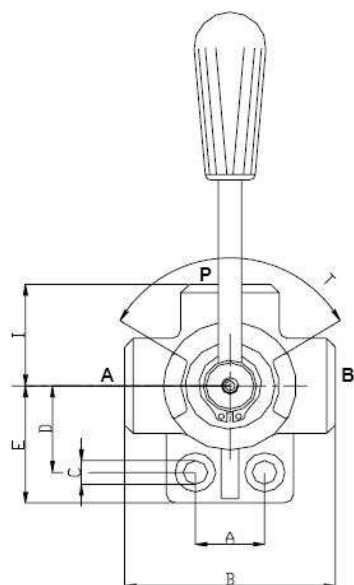

CODICE

Filetto

2250002010	3/8
2250002013	1/2
2250002019	3/4
2250002025	1"
2250002038	1" 1/2

Caratteristiche

Dimensione/ <i>Dimension</i>	02	03	04	05	07
Pressione max/ <i>Max Pressure</i> bar	315	280	250	250	200
Portata max/ <i>Max Flow</i> l/min	60	90	120	180	280

Dimensioni e pesi

Dimensione	A	B	C	D	E	F	G	H GAS	H NPT	H SAE	I	L	T°	Peso Weight kg
02 3/8	24	73	8.5	31	42	21	62	3/8	3/8	3/4-16	36	125	100	0.87
03 1/2	30	85	11	36	53	24	70	1/2	1/2	7/8-14	43	125	100	1.45
04 3/4	32	91	11	41	58	28	80	3/4	3/4	11/16-12	47	125	100	1.84
05 1"	32	98	11	50	64	31.5	90	1	1	15/16-12	51	160	100	2.51
07 1" 1/2	42	130	11	64	80	44	115	1 1/2	1 1/2	1 7/8-12	65	160	100	6.10

CODICE

Filetto

Dimensione/Dimension	02	03	04
Pressione max/Max Pressure bar	250	250	220
Portata max/Max Flow l/min	35	50	90



CODICE

Filetto

Technical drawing of a double-throw lever switch. The drawing shows a side view of the switch mechanism. A vertical dimension line on the left indicates the height of the handle, labeled 'D'. The handle has a ribbed, bulbous top. The switch body is symmetrical with two lever arms, labeled 'P' and 'P1', each with a width dimension 'G'. Below the levers are two circular contact points, labeled 'B' and 'B1'. The distance between the centers of these contact points is labeled 'E'. The overall width of the switch body is labeled 'F'.

Dimensione/Dimension	02	03	04	05
Pressione max/Max Pressure bar	315	280	250	250
Portata max/Max Flow l/min	60	90	120	180

DISTRIBUTORE MONOBLOCCO 1 LEVA ART. FM 45

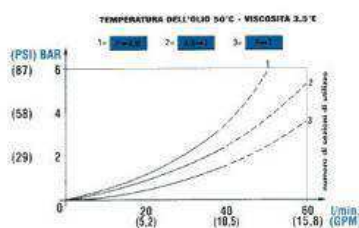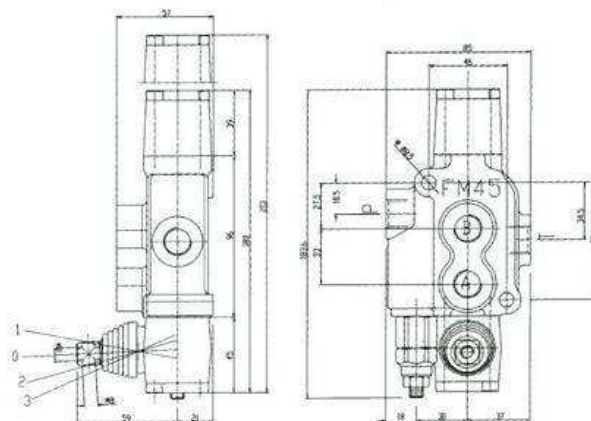



NUMERO DI SEZIONI	L	I	KG
FM 45	85	46	2.2

CARATTERISTICHE TECNICHE		
PORTATA NOMINALE	35 l/min	9 GPM
PORTATA MASSIMA	45 l/min	12 GPM
PRESSIONE NOMINALE	250 BAR	3600 PSI
PRESSIONE MAX SUGLI UTILIZZI	320 BAR	4700 PSI
PRESSIONE MAX ALLO SCARICO	80 BAR	1100 PSI

FILETTATURE STANDARD altre filettature disponibili su richiesta




COD	A-B	P	T	P2	T2
G (BSP)	3/8"	-	-	3/8"	3/8"
F (UNF)	3/4" - 16	-	-	3/4" - 16	3/4" - 16

DISTRIBUTORE MONOBLOCCO 3 LEVE ART. FM 35

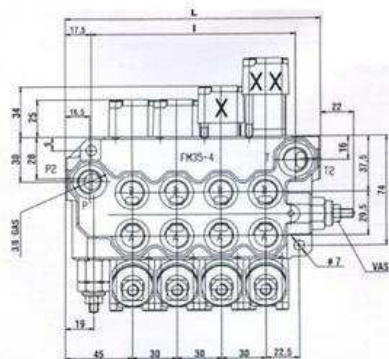

X = POSIZIONATORI 2-3

XX = POSIZIONATORE 16

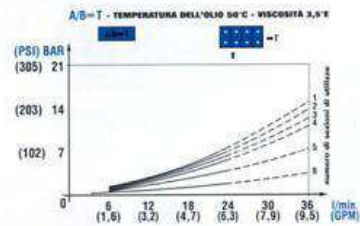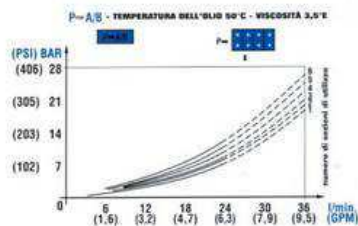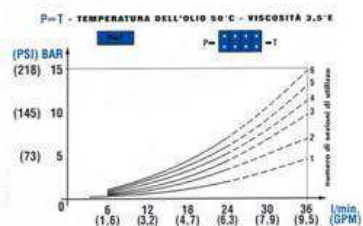



NUMERO DI SEZIONI	L	I	KG
FM 35/1	81,5	50	1,8
FM 35/2	111,5	80	2,7
FM 35/3	141,5	110	3,8
FM 35/4	171,5	140	4,6
FM 35/5	201,5	170	5,4
FM 35/6	231,5	200	6,2

CARATTERISTICHE TECNICHE		
PORTATA NOMINALE	25 l/min	6,6 GPM
PORTATA MASSIMA	35 l/min	9,2 GPM
PRESSIONE NOMINALE	280 BAR	4000 PSI
PRESSIONE MAX SUGLI UTILIZZI	300 BAR	4400 PSI
PRESSIONE MAX ALLO SCARICO	80 BAR	1100 PSI




FILETTATURE STANDARD altre filettature disponibili su richiesta

COD	A-B	P	T	P2	T2
G (BSP)	3/8"	3/8"	3/8"	3/8"	3/8"
Filettatura alternativa G (BSP)	1/4"	1/4"	1/4"	3/8"	3/8"
F (UNF)	3/4" - 16	3/4" - 16	3/4" - 16	3/4" - 16	3/4" - 16

DISTRIBUTORE MONOBLOCCO 4 LEVE ART. FM 55

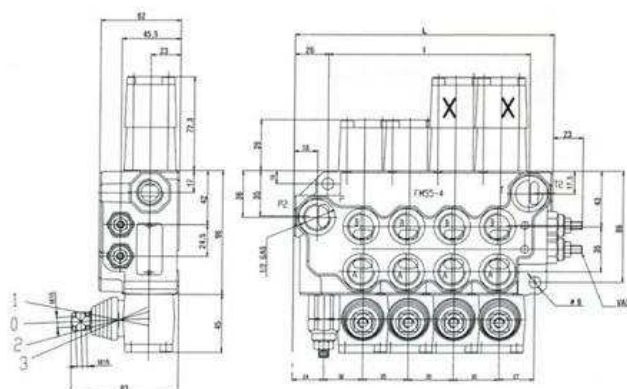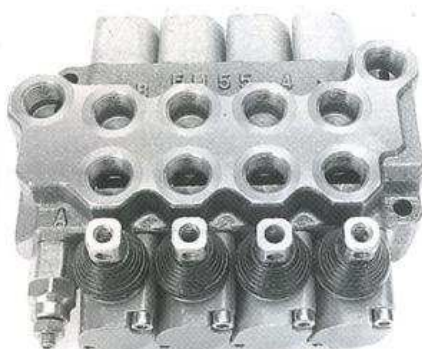

X = POSIZIONATORE 2-3

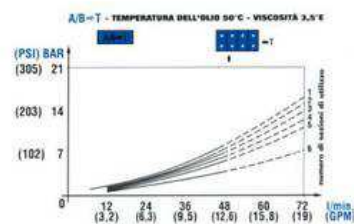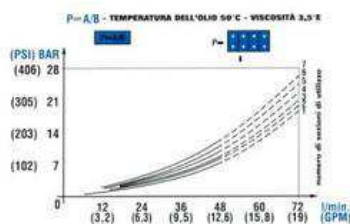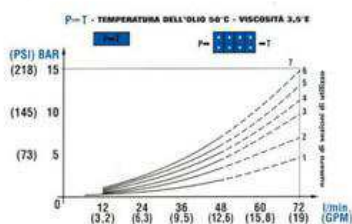

NUMERO DI SEZIONI	L	I	KG
FM 55/1	94	55	2,8
FM 55/2	129	90	4,2
FM 55/3	164	125	5,5
FM 55/4	199	160	6,7
FM 55/5	234	195	7,9
FM 55/6	269	230	9,3

CARATTERISTICHE TECNICHE		
PORTATA NOMINALE	50 l/min	13,1 GPM
PORTATA MASSIMA	70 l/min	18,4 GPM
PRESSIONE NOMINALE	280 BAR	4000 PSI
PRESSIONE MAX SUGLI UTILIZZI	300 BAR	4400 PSI
PRESSIONE MAX ALLO SCARICO	80 BAR	1100 PSI

FILETTATURE STANDARD altre filettature disponibili su richiesta

COD	A-B	P	T	P2	T2
G (BSP)	1/2"	1/2"	1/2"	1/2"	1/2"
filettatura alternativa G (BSP)	3/8"	3/8"	1/2"	1/2"	1/2"
F (UNF)	7/8" - 14	7/8" - 14	7/8" - 14	7/8" - 16	7/8" - 14