



SERIE 550120: MASCHIO BSP CILINDRICO SV. 60°




Codice	DI Tubo in	DI Tubo mm	Dash	F Filetto in-TPI	F Filetto Dash	C Cut-off mm	CH1 mm
550120-02-03	3/16	4,8	03	1/8-28	02	21,3	14,0
550120-02-04	1/4	6,4	04	1/8-28	02	21,7	14,0
550120-04-04	1/4	6,4	04	1/4-19	04	26,3	19,0
550120-06-04	1/4	6,4	04	3/8-19	06	27,8	22,0
550120-08-04	1/4	6,4	04	1/2-14	08	31,3	27,0
550120-06-05	5/16	7,9	05	3/8-19	06	27,8	22,0
550120-08-05	5/16	7,9	05	1/2-14	08	31,3	27,0
550120-06-06	3/8	9,5	06	3/8-19	06	27,8	22,0
550120-08-06	3/8	9,5	06	1/2-14	08	31,3	27,0
550120-06-08	1/2	12,7	08	3/8-19	06	28,6	22,0
550120-08-08	1/2	12,7	08	1/2-14	08	32,1	27,0
550120-10-08	1/2	12,7	08	5/8-14	10	36,1	30,0
550120-12-08	1/2	12,7	08	3/4-14	12	34,1	32,0
550120-08-10	5/8	15,9	10	1/2-14	08	32,1	27,0
550120-10-10	5/8	15,9	10	5/8-14	10	36,1	30,0
550120-12-10	5/8	15,9	10	3/4-14	12	34,1	32,0
550120-12-12	3/4	19,0	12	3/4-14	12	34,6	32,0
550120-16-12	3/4	19,0	12	1-11	16	39,6	41,0
550120-16-16	1	25,4	16	1-11	16	40,4	41,0
550120-20-16	1	25,4	16	1 1/4-11	20	42,4	50,0
550120-20-20	1 1/4	31,8	20	1 1/4-11	20	47,0	50,0
550120-24-24	1 1/2	38,1	24	1 1/2-11	24	49,0	55,0
550120-32-32	2	50,8	32	2-11	32	53,5	70,0

SERIE 550150: MASCHIO BSPT CONICO SV. 60°



Codice	DI Tubo in	DI Tubo mm	Dash	F Filetto in-TPI	F Filetto Dash	C Cut-off mm	CH1 mm
550150-02-03	3/16	4,8	03	1/8-28	02	20,8	12,0
550150-02-04	1/4	6,4	04	1/8-28	02	22,3	12,0
550150-04-04	1/4	6,4	04	1/4-19	04	26,3	17,0
550150-06-04	1/4	6,4	04	3/8-19	06	26,3	19,0
550150-06-05	5/16	7,9	05	3/8-19	06	26,3	19,0
550150-06-06	3/8	9,5	06	3/8-19	06	26,3	19,0
550150-08-06	3/8	9,5	06	1/2-14	08	33,3	22,0
550150-08-08	1/2	12,7	08	1/2-14	08	34,1	22,0
550150-12-10	5/8	15,9	10	3/4-14	12	34,1	27,0
550150-12-12	3/4	19,0	12	3/4-14	12	34,6	27,0
550150-16-12	3/4	19,0	12	1-11	16	42,6	36,0
550150-16-16	1	25,4	16	1-11	16	43,4	36,0
550150-20-20	1 1/4	31,8	20	1 1/4-11	20	49,0	46,0
550150-24-24	1 1/2	38,1	24	1 1/2-11	24	49,0	50,0
550150-32-32	2	50,8	32	2-11	32	52,0	65,0


SERIE A55001: FEMMINA BSP SV. 60°



Codice	DI Tubo in	DI Tubo mm	Dash	F Filetto in-TPI	F Filetto Dash	C Cut-off mm	CH2 mm
A55001-02-03*	3/16	4,8	03	1/8-28	02	13,8	14,0
A55001-04-03***	3/16	4,8	03	1/4-19	04	16,0	19,0
A55001-02-04*	1/4	6,4	04	1/8-28	02	14,2	14,0
A55001-04-04***	1/4	6,4	04	1/4-19	04	16,0	19,0
A55001-06-04***	1/4	6,4	04	3/8-19	06	16,0	22,0
A55001-04-05*	5/16	7,9	05	1/4-19	04	17,3	19,0
A55001-06-05***	5/16	7,9	05	3/8-19	06	18,0	22,0
A55001-04-06*	3/8	9,5	06	1/4-19	04	17,3	19,0
A55001-06-06***	3/8	9,5	06	3/8-19	06	17,0	22,0
A55001-08-06***	3/8	9,5	06	1/2-14	08	17,0	27,0
A55001-06-08*	1/2	12,7	08	3/8-19	06	18,6	22,0
A55001-08-08***	1/2	12,7	08	1/2-14	08	18,0	27,0
A55001-10-08***	1/2	12,7	08	5/8-14	10	17,0	27,0
A55001-12-08***	1/2	12,7	08	3/4-14	12	22,0	32,0
A55001-10-10*	5/8	15,9	10	5/8-14	10	17,1	27,0
A55001-12-10***	5/8	15,9	10	3/4-14	12	20,0	32,0
A55001-12-12*	3/4	19,0	12	3/4-14	12	20,6	32,0
A55001-16-12***	3/4	19,0	12	1-11	16	23,0	38,0
A55001-16-16*	1	25,4	16	1-11	16	23,9	38,0
A55001-20-16***	1	25,4	16	1 1/4-11	20	30,5	50,0
A55001-20-20**	1 1/4	31,8	20	1 1/4-11	20	32,0	50,0
A55001-24-20***	1 1/4	31,8	20	1 1/2-11	24	41,9	55,0
A55001-24-24**	1 1/2	38,1	24	1 1/2-11	24	33,8	55,0
A55001-32-24***	1 1/2	38,1	24	2-11	32	47,0	70,0
A55001-32-32**	2	50,8	32	2-11	32	34,0	70,0

*Dado pinzato **Dado spinato ***Dado a battuta


SERIE A55061: FEMMINA 45° BSP SV. 60°



Codice	DI Tubo in	DI Tubo mm	Dash	F Filetto in-TPI	F Filetto Dash	C Cut-off mm	D Drop mm	CH2 mm
A55061-04-04***	1/4	6,4	04	1/4-19	04	44,5	15,0	19,0
A55061-06-04***	1/4	6,4	04	3/8-19	06	43,0	16,9	22,0
A55061-06-05***	5/16	7,9	05	3/8-19	06	48,0	18,0	22,0
A55061-06-06***	3/8	9,5	06	3/8-19	06	50,0	20,5	22,0
A55061-08-06***	3/8	9,5	06	1/2-14	08	53,5	21,0	27,0
A55061-08-08***	1/2	12,7	08	1/2-14	08	56,0	21,0	27,0
A55061-10-08***	1/2	12,7	08	5/8-14	10	61,0	23,0	27,0
A55061-12-08***	1/2	12,7	08	3/4-14	12	61,0	23,0	32,0
A55061-10-10*	5/8	15,9	10	5/8-14	10	64,0	21,5	27,0
A55061-12-10***	5/8	15,9	10	3/4-14	12	69,0	22,5	32,0
A55061-12-12*	3/4	19,0	12	3/4-14	12	67,6	28,0	32,0
A55061-16-12***	3/4	19,0	12	1-11	16	77,5	31,5	38,0
A55061-16-16*	1	25,4	16	1-11	16	72,5	34,0	38,0
A55061-20-16***	1	25,4	16	1 1/4-11	20	102,0	47,5	50,0
A55061-20-20**	1 1/4	31,8	20	1 1/4-11	20	101,0	40,0	50,0
A55061-24-20***	1 1/4	31,8	20	1 1/2-14	24	118,5	38,0	55,0
A55061-24-24**	1 1/2	38,1	24	1 1/2-14	24	111,0	46,0	55,0
A55061-32-24***	1 1/2	38,1	24	2-11	32	126,5	45,0	70,0
A55061-32-32**	2	50,8	32	2-11	32	154,0	60,0	70,0

*Dado pinzato **Dado spinato ***Dado a battuta


SERIE A55051: FEMMINA 90° BSP SV. 60°

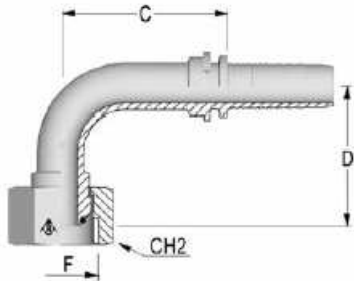

Codice	DI Tubo in	DI Tubo mm	Dash	F Filetto in-TPI	F Filetto Dash	C Cut-off mm	D Drop mm	CH2 mm
A55051-02-03*	3/16	4,8	03	1/8-28	02	23,8	30,0	14,0
A55051-04-03***	3/16	4,8	03	1/4-19	04	28,0	30,0	19,0
A55051-04-04***	1/4	6,4	04	1/4-19	04	29,3	29,0	19,0
A55051-06-04***	1/4	6,4	04	3/8-19	06	28,0	30,5	22,0
A55051-06-05***	5/16	7,9	05	3/8-19	06	34,0	35,5	22,0
A55051-06-06***	3/8	9,5	06	3/8-19	06	39,5	42,0	22,0
A55051-08-06***	3/8	9,5	06	1/2-14	08	33,0	36,0	27,0
A55051-08-08***	1/2	12,7	08	1/2-14	08	40,0	41,0	27,0
A55051-10-08***	1/2	12,7	08	5/8-14	10	42,5	43,0	27,0
A55051-12-08***	1/2	12,7	08	3/4-14	12	42,5	43,0	32,0
A55051-10-10*	5/8	15,9	10	5/8-14	10	50,2	47,0	27,0
A55051-12-10***	5/8	15,9	10	3/4-14	12	48,0	46,0	32,0
A55051-12-12*	3/4	19,0	12	3/4-14	12	53,5	53,0	32,0
A55051-16-12***	3/4	19,0	12	1-11	16	54,0	50,0	38,0
A55051-16-16*	1	25,4	16	1-11	16	73,4	69,0	38,0
A55051-20-16***	1	25,4	16	1 1/4-11	20	78,5	88,5	50,0
A55051-20-20**	1 1/4	31,8	20	1 1/4-11	20	83,0	83,0	50,0
A55051-24-20***	1 1/4	31,8	20	1 1/2-11	24	101,5	83,0	55,0
A55051-24-24**	1 1/2	38,1	24	1 1/2-11	24	96,0	96,0	55,0
A55051-32-24***	1 1/2	38,1	24	2-11	32	114,0	110,0	70,0
A55051-32-32**	2	50,8	32	2-11	32	138,0	136,0	70,0

*Dado pinzato **Dado spinato ***Dado a battuta


SERIE A55180: FEMMINA 90° COMPATTA BSP SV. 60°



Codice	DI Tubo in	DI Tubo mm	Dash	F Filetto in-TPI	F Filetto Dash	C Cut-off mm	D Drop mm	CH2 mm
A55180-04-04*	1/4	6,4	04	1/4-19	04	17,7	19,0	19,0
A55180-06-06*	3/8	9,5	06	3/8-19	06	19,5	21,5	22,0
A55180-08-06*	3/8	9,5	06	1/2-14	08	21,5	22,5	27,0
A55180-08-08*	1/2	12,7	08	1/2-14	08	22,2	22,5	27,0
A55180-12-12*	3/4	19,0	12	3/4-14	12	26,7	31,0	32,0

*Dado pinzato **Dado spinato ***Dado a battuta


SERIE A55003: FEMMINA BSP SEDE PIANA

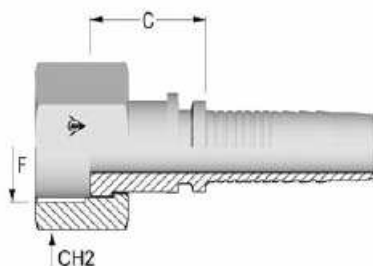

Codice	DI Tubo in	DI Tubo mm	Dash	F Filetto in-TPI	F Filetto Dash	C Cut-off mm	CH2 mm
A55003-04-04***	1/4	6,4	04	1/4-19	04	20,3	19,0
A55003-06-06***	3/8	9,5	06	3/8-19	06	20,3	22,0
A55003-08-06***	3/8	9,5	06	1/2-14	08	20,8	27,0
A55003-08-08***	1/2	12,7	08	1/2-14	08	21,6	27,0
A55003-12-08***	1/2	12,7	08	3/4-14	12	24,6	32,0
A55003-12-12*	3/4	19,0	12	3/4-14	12	18,0	32,0
A55003-16-16*	1	25,4	16	1-11	16	18,0	32,0


*Dado pinzato **Dado spinato ***Dado a battuta

SERIE 552910: OCCHIO BSP

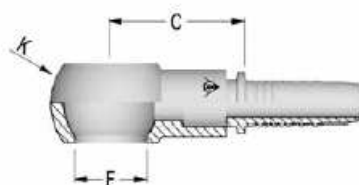


Codice	DI Tubo in	DI Tubo mm	Dash	F Filetto in-TPI	F Filetto Dash	C Cut-off mm	K mm
552910-02-04	1/4	6,4	04	1/8-28	02	20,0	17,0
552910-04-04	1/4	6,4	04	1/4-19	04	26,5	22,0
552910-06-04	1/4	6,4	04	3/8-19	06	30,5	28,0
552910-06-05	5/16	7,9	05	3/8-19	06	30,5	28,0
552910-06-06	3/8	9,5	06	3/8-19	06	30,5	28,0
552910-08-06	3/8	9,5	06	1/2-14	08	34,5	38,0
552910-06-08	1/2	12,7	08	3/8-19	06	30,5	28,0
552910-08-08	1/2	12,7	08	1/2-14	08	35,0	38,0
552910-10-10	5/8	15,9	10	5/8-14	10	38,0	40,0
552910-12-12	3/4	19,0	12	3/4-14	12	41,5	46,0
552910-16-16	1	25,4	16	1-11	16	50,5	58,0

SERIE 551690: MASCHIO METRICO CEL SV. 24° DIN 3853 SERIE LEGGERA

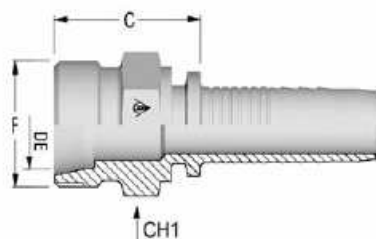


Codice	DI Tubo in	DI Tubo mm	Dash	F Filetto mm	DE Tubo mm	C Cut-off mm	CH1 mm
551690-03-04	1/4	6,4	04	12x1,5	6L	21,7	14,0
551690-04-04	1/4	6,4	04	14x1,5	8L	22,3	14,0
551690-05-04	1/4	6,4	04	16x1,5	10L	23,3	17,0
551690-05-05	5/16	7,9	05	16x1,5	10L	23,3	17,0
551690-06-05	5/16	7,9	05	18x1,5	12L	23,3	19,0
551690-05-06	3/8	9,5	06	16x1,5	10L	23,3	17,0
551690-06-06	3/8	9,5	06	18x1,5	12L	23,3	19,0
551690-08-06	3/8	9,5	06	22x1,5	15L	25,3	22,0
551690-08-08	1/2	12,7	08	22x1,5	15L	26,1	22,0
551690-10-08	1/2	12,7	08	26x1,5	18L	27,1	27,0
551690-10-10	5/8	15,9	10	26x1,5	18L	27,1	27,0
551690-12-12	3/4	19,0	12	30x2	22L	29,6	32,0
551690-16-16	1	25,4	16	36x2	28L	33,4	36,0
551690-20-20	1 1/4	31,8	20	45x2	35L	40,0	46,0
551690-24-24	1 1/2	38,1	24	52x2	42L	40,0	55,0

SERIE 551700: MASCHIO METRICO CES SV. 24° DIN 3853 SERIE PESANTE

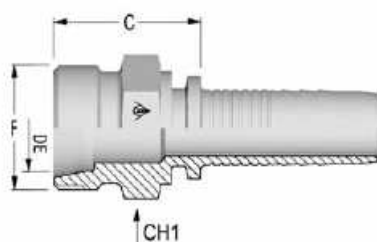

Codice	DI Tubo in	DI Tubo mm	Dash	F Filetto mm	DE Tubo mm	C Cut-off mm	CH1 mm
551700-03-04	1/4	6,4	04	16x1,5	8S	24,3	17,0
551700-04-04	1/4	6,4	04	18x1,5	10S	24,3	19,0
551700-05-05	5/16	7,9	05	20x1,5	12S	25,3	22,0
551700-05-06	3/8	9,5	06	20x1,5	12S	25,3	22,0
551700-06-06	3/8	9,5	06	22x1,5	14S	27,3	22,0
551700-08-08	1/2	12,7	08	24x1,5	16S	29,1	24,0
551700-10-08	1/2	12,7	08	30x2	20S	31,1	32,0
551700-10-10	5/8	15,9	10	30x2	20S	31,1	32,0
551700-10-12	3/4	19,0	12	30x2	20S	31,6	32,0
551700-12-12	3/4	19,0	12	36x2	25S	36,6	36,0
551700-12-16	1	25,4	16	36x2	25S	37,4	36,0
551700-16-16	1	25,4	16	42x2	30S	42,4	46,0
551700-20-20	1 1/4	31,8	20	52x2	38S	46,0	55,0


SERIE A55146: FEMMINA METRICA DKO-L C/O-RING SV. 24° DIN 3865 SERIE LEGGERA



Codice	DI Tubo in	DI Tubo mm	Dash	F Filetto mm	DE Tubo mm	C Cut-off mm	CH2 mm
A55146-03-04*	1/4	6,4	04	12x1,5	6L	20,3	14,0
A55146-04-04***	1/4	6,4	04	14x1,5	8L	24,4	17,0
A55146-05-04***	1/4	6,4	04	16x1,5	10L	25,4	19,0
A55146-05-05***	5/16	7,9	05	16x1,5	10L	25,4	19,0
A55146-06-05***	5/16	7,9	05	18x1,5	12L	25,4	22,0
A55146-05-06***	3/8	9,5	06	16x1,5	10L	25,4	19,0
A55146-06-06***	3/8	9,5	06	18x1,5	12L	25,4	22,0
A55146-08-08***	1/2	12,7	08	22x1,5	15L	28,2	27,0
A55146-10-10***	5/8	15,9	10	26x1,5	18L	29,2	32,0
A55146-12-12***	3/4	19,0	12	30x2	22L	31,7	36,0
A55146-16-16***	1	25,4	16	36x2	28L	33,6	41,0
A55146-20-20***	1 1/4	31,8	20	45x2	35L	40,1	50,0
A55146-24-24***	1 1/2	38,1	24	52x2	42L	40,5	60,0

*Dado pinzato **Dado spinato ***Dado a battuta


SERIE A55A51: FEMM. 45° METRICA DKO-L SV. 24° C/O-RING DIN 3865 SERIE LEGGERA

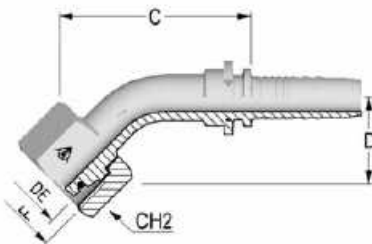

Codice	DI Tubo in	DI Tubo mm	Dash	F Filetto mm	DE Tubo mm	C Cut-off mm	D Drop mm	CH2 mm
A55A51-03-04*	1/4	6,4	04	12x1,5	6L	42,7	15,0	14,0
A55A51-04-04***	1/4	6,4	04	14x1,5	8L	42,7	17,5	17,0
A55A51-05-04***	1/4	6,4	04	16x1,5	10L	42,7	20,0	19,0
A55A51-05-05***	5/16	7,9	05	16x1,5	10L	53,3	26,6	19,0
A55A51-06-06***	3/8	9,5	06	18x1,5	12L	47,3	19,5	22,0
A55A51-08-08***	1/2	12,7	08	22x1,5	15L	61,3	26,8	27,0
A55A51-10-10***	5/8	15,9	10	26x1,5	18L	72,3	29,1	32,0
A55A51-12-12***	3/4	19,0	12	30x2	22L	75,6	36,5	36,0
A55A51-16-16***	1	25,4	16	36x2	28L	92,9	32,0	41,0
A55A51-20-20***	1 1/4	31,8	20	45x2	35L	120,5	45,0	50,0
A55A51-24-24***	1 1/2	38,1	24	52x2	42L	118,0	47,0	60,0

*Dado pinzato **Dado spinato ***Dado a battuta


SERIE A55A50: FEMMINA METRICA 90° DKOL C/O RING SV. 24° DIN 3865 SERIE LEGGERA



Codice	DI Tubo in	DI Tubo mm	Dash	F Filetto mm	DE Tubo mm	C Cut-off mm	D Drop mm	CH2 mm
A55A50-03-04*	1/4	6,4	04	12x1,5	6L	27,7	30,0	14,0
A55A50-04-04***	1/4	6,4	04	14x1,5	8L	27,7	32,5	17,0
A55A50-05-04***	1/4	6,4	04	16x1,5	10L	27,7	32,5	19,0
A55A50-05-05***	5/16	7,9	05	16x1,5	10L	34,7	38,0	19,0
A55A50-06-05***	5/16	7,9	05	18x1,5	12L	34,7	40,0	22,0
A55A50-06-06***	3/8	9,5	06	18x1,5	12L	37,3	39,0	22,0
A55A50-08-08***	1/2	12,7	08	22x1,5	15L	40,5	40,5	27,0
A55A50-10-08***	1/2	12,7	08	26x1,5	18L	40,5	41,0	32,0
A55A50-10-10***	5/8	15,9	10	26x1,5	18L	51,7	48,0	32,0
A55A50-12-12***	3/4	19,0	12	30x2	22L	56,0	59,0	36,0
A55A50-16-16***	1	25,4	16	36x2	28L	82,4	68,0	41,0
A55A50-20-20***	1 1/4	31,8	20	45x2	35L	91,5	89,0	50,0
A55A50-24-24***	1 1/2	38,1	24	52x2	42L	113,0	100,0	60,0

*Dado pirzato **Dado spinato ***Dado a battuta


SERIE A55179: FEMMINA METRICA DKOS SV. 24° C/O RING DIN 3865 SERIE PESANTE



Codice	DI Tubo in	DI Tubo mm	Dash	F Filetto mm	DE Tubo mm	C Cut-off mm	CH2 mm
A55179-03-03***	3/16	4,8	03	16x1,5	8S	27,2	19,0
A55179-03-04***	1/4	6,4	04	16x1,5	8S	27,7	19,0
A55179-04-04***	1/4	6,4	04	18x1,5	10S	27,6	22,0
A55179-04-05***	5/16	7,9	05	18x1,5	10S	27,6	22,0
A55179-05-05***	5/16	7,9	05	20x1,5	12S	27,6	24,0
A55179-05-06***	3/8	9,5	06	20x1,5	12S	27,6	24,0
A55179-06-06***	3/8	9,5	06	22x1,5	14S	31,1	27,0
A55179-08-08***	1/2	12,7	08	24x1,5	16S	31,9	30,0
A55179-10-10***	5/8	15,9	10	30x2	20S	27,4	36,0
A55179-10-12***	3/4	19,0	12	30x2	20S	39,9	30,0
A55179-12-12***	3/4	19,0	12	36x2	25S	40,2	46,0
A55179-12-16***	1	25,4	16	36x2	25S	40,6	46,0
A55179-16-16***	1	25,4	16	42x2	30S	43,1	50,0
A55179-20-20***	1 1/4	31,8	20	52x2	38S	48,1	60,0

*Dado pirzato **Dado spinato ***Dado a battuta


SERIE A55A56: FEMMINA METRICA 45° DKOS C/O-RING SV. 24° DIN 3865 SERIE PESANTE

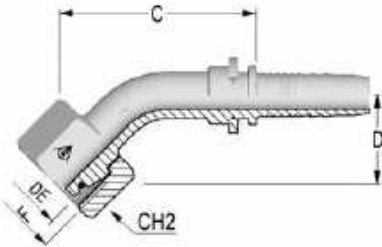

Codice	DI Tubo in	DI Tubo mm	Dash	F Filetto mm	DE Tubo mm	C Cut-off mm	D Drop mm	CH2 mm
A55A56-03-04***	1/4	6,4	04	16x1,5	8S	43,2	18,0	19,0
A55A56-04-04***	1/4	6,4	04	18x1,5	10S	44,2	19,0	22,0
A55A56-05-05***	5/16	7,9	05	20x1,5	12S	48,7	21,0	24,0
A55A56-05-06***	3/8	9,5	06	20x1,5	12S	54,3	26,5	24,0
A55A56-06-06***	3/8	9,5	06	22x1,5	14S	53,3	21,0	27,0
A55A56-08-08***	1/2	12,7	08	24x1,5	16S	56,0	21,5	30,0
A55A56-10-10***	5/8	15,9	10	30x2	20S	67,7	30,0	36,0
A55A56-12-12***	3/4	19,0	12	36x2	25S	71,0	33,0	46,0
A55A56-12-16***	1	25,4	16	36x2	25S	92,4	36,0	46,0
A55A56-16-16***	1	25,4	16	42x2	30S	111,9	40,5	50,0
A55A56-20-20***	1 1/4	31,8	20	52x2	38S	110,5	45,0	60,0

*Dado pinzato **Dado spinato ***Dado a battuta


SERIE A55A57: FEMM. METRICA 90° DKOS SV. 24° C/O-RING DIN 3865 SERIE PESANTE

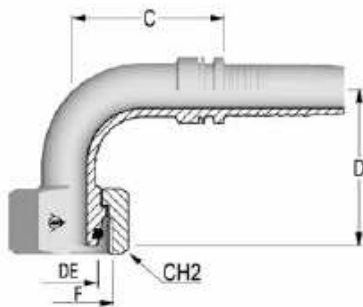

Codice	DI Tubo in	DI Tubo mm	Dash	F Filetto mm	DE Tubo mm	C Cut-off mm	D Drop mm	CH2 mm
A55A57-03-04***	1/4	6,4	04	16x1,5	8S	28,2	33,0	19,0
A55A57-04-04***	1/4	6,4	04	18x1,5	10S	28,2	33,0	22,0
A55A57-05-05***	5/16	7,9	05	20x1,5	12S	35,7	39,0	24,0
A55A57-05-06***	3/8	9,5	06	20x1,5	12S	35,3	50,1	24,0
A55A57-06-06***	3/8	9,5	06	22x1,5	14S	38,8	40,5	27,0
A55A57-08-08***	1/2	12,7	08	24x1,5	16S	40,5	41,5	30,0
A55A57-10-10***	5/8	15,9	10	30x2	20S	51,7	55,0	36,0
A55A57-10-12***	3/4	19,0	12	30x2	20S	62,5	58,0	36,0
A55A57-12-12***	3/4	19,0	12	36x2	25S	55,0	59,5	46,0
A55A57-12-16***	1	25,4	16	36x2	25S	76,4	78,5	46,0
A55A57-16-16***	1	25,4	16	42x2	30S	78,4	79,0	50,0
A55A57-16-20***	1 1/4	31,8	20	42x2	30S	98,0	92,0	50,0
A55A57-20-20***	1 1/4	31,8	20	52x2	38S	98,0	92,0	60,0


*Dado pinzato **Dado spinato ***Dado a battuta

SERIE 551800: MASCHIO METRICO CEM SV. 60°




Codice	DI Tubo in	DI Tubo mm	Dash	F Filetto mm	C Cut-off mm	CH1 mm
551800-03-03	3/16	4,8	03	12X1,5	26,0	17,0
551800-03-04	1/4	6,4	04	12X1,5	26,5	17,0
551800-04-04	1/4	6,4	04	14X1,5	26,5	19,0
551800-05-04	1/4	6,4	04	16X1,5	26,5	22,0
551800-05-05	5/16	7,9	05	16X1,5	26,5	22,0
551800-06-05	5/16	7,9	05	18X1,5	27,5	24,0
551800-04-06	3/8	9,5	06	14X1,5	26,5	19,0
551800-05-06	3/8	9,5	06	16X1,5	26,5	22,0
551800-06-06	3/8	9,5	06	18X1,5	27,5	24,0
551800-06-08	1/2	12,7	08	18X1,5	28,5	24,0
551800-08-08	1/2	12,7	08	22X1,5	31,5	27,0
551800-10-10	5/8	15,9	10	26X1,5	34,5	32,0
551800-10-12	3/4	19,0	12	26X1,5	34,5	32,0
551800-12-12	3/4	19,0	12	30X1,5	35,5	36,0
551800-16-16	1	25,4	16	38X1,5	39,5	46,0
551800-20-20	1.1/4	31,8	20	45X1,5	39,0	55,0

SERIE A55140: FEMMINA METRICA DKM SV. 60°

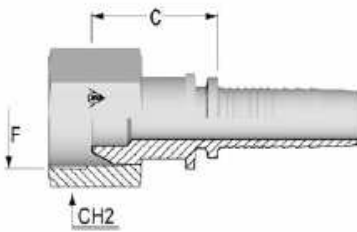


Codice	DI Tubo in	DI Tubo mm	Dash	F Filetto mm	C Cut-off mm	CH2 mm
A55140-02-03	3/16	4,8	03	10X1	19,0	15,0
A55140-03-03	3/16	4,8	03	12X1,5	19,0	17,0
A55140-02-04	1/4	6,4	04	10X1	19,0	15,0
A55140-03-04	1/4	6,4	04	12X1,5	19,0	17,0
A55140-04-04	1/4	6,4	04	14X1,5	18,0	17,0
A55140-05-04	1/4	6,4	04	16X1,5	20,0	22,0
A55140-06-04	1/4	6,4	04	18X1,5	20,0	22,0
A55140-04-05	5/16	7,9	05	14X1,5	18,0	17,0
A55140-05-05	5/16	7,9	05	16X1,5	20,0	22,0
A55140-06-05	5/16	7,9	05	18X1,5	20,0	22,0
A55140-04-06	3/8	9,5	06	14X1,5	18,0	17,0
A55140-05-06	3/8	9,5	06	16X1,5	20,0	22,0
A55140-06-06	3/8	9,5	06	18X1,5	20,0	22,0
A55140-07-06	3/8	9,5	06	20X1,5	22,0	27,0
A55140-08-06	3/8	9,5	06	22X1,5	22,0	27,0
A55140-06-08	1/2	12,7	08	18X1,5	21,0	22,0
A55140-07-08	1/2	12,7	08	20X1,5	23,0	27,0
A55140-08-08	1/2	12,7	08	22X1,5	23,0	27,0
A55140-09-08	1/2	12,7	08	24X1,5	23,0	30,0
A55140-10-08	1/2	12,7	08	26X1,5	25,0	32,0
A55140-10-10	5/8	15,9	10	26X1,5	25,0	32,0
A55140-10-12	3/4	19,0	12	26X1,5	26,0	32,0
A55140-12-12	3/4	19,0	12	30X1,5	26,0	36,0
A55140-16-16	1	25,4	16	38X1,5	30,0	46,0
A55140-20-20	1.1/4	31,8	20	45X1,5	34,0	50,0

SERIE A55A41: FEMMINA METRICA 45° DKM SV. 60°

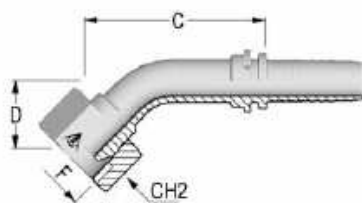


Codice	DI Tubo in	DI Tubo mm	Dash	F Filetto mm	C Cut-off mm	D Drop mm	CH2 mm
A55A41-04-04	1/4	6,4	04	14X1,5	36,0	14,0	17,0
A55A41-05-04	1/4	6,4	04	16X1,5	37,5	16,0	22,0
A55A41-06-04	1/4	6,4	04	18X1,5	37,5	16,0	22,0
A55A41-05-05	5/16	7,9	05	16X1,5	44,0	17,0	22,0
A55A41-06-05	5/16	7,9	05	18X1,5	44,0	17,0	22,0
A55A41-05-06	3/8	9,5	06	16X1,5	48,0	18,0	22,0
A55A41-06-06	3/8	9,5	06	18X1,5	48,0	20,0	22,0
A55A41-07-06	3/8	9,5	06	20X1,5	49,5	20,0	27,0
A55A41-08-06	3/8	9,5	06	22X1,5	49,5	20,0	27,0
A55A41-07-08	1/2	12,7	08	20X1,5	58,5	22,0	27,0
A55A41-08-08	1/2	12,7	08	22X1,5	58,5	22,0	27,0
A55A41-10-10	5/8	15,9	10	26X1,5	68,0	25,0	32,0
A55A41-10-12	3/4	19,0	12	26X1,5	68,0	28,0	32,0
A55A41-16-16	1	25,4	16	38X1,5	85,0	33,0	46,0
A55A41-20-20	1.1/4	31,8	20	45X1,5	85,0	40,0	50,0

SERIE A55A40: FEMMINA METRICA 90° DKM SV. 60°

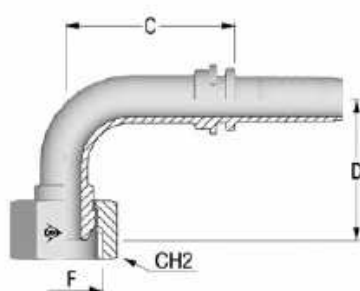


Codice	DI Tubo in	DI Tubo mm	Dash	F Filetto mm	C Cut-off mm	D Drop mm	CH2 mm
A55A40-04-04	1/4	6,4	04	14X1,5	23,0	26,0	17,0
A55A40-05-04	1/4	6,4	04	16X1,5	23,0	28,0	22,0
A55A40-06-04	1/4	6,4	04	18X1,5	23,0	28,0	22,0
A55A40-05-05	5/16	7,9	05	16X1,5	29,0	32,5	22,0
A55A40-06-05	5/16	7,9	05	18X1,5	29,0	32,5	22,0
A55A40-05-06	3/8	9,5	06	16X1,5	33,0	35,5	22,0
A55A40-06-06	3/8	9,5	06	18X1,5	33,0	35,5	22,0
A55A40-07-06	3/8	9,5	06	20X1,5	33,0	37,5	27,0
A55A40-08-06	3/8	9,5	06	22X1,5	33,0	37,5	27,0
A55A40-07-08	1/2	12,7	08	20X1,5	39,5	43,0	27,0
A55A40-08-08	1/2	12,7	08	22X1,5	39,5	43,0	27,0
A55A40-10-10	5/8	15,9	10	26X1,5	47,5	51,0	32,0
A55A40-10-12	3/4	19,0	12	26X1,5	55,5	57,0	32,0
A55A40-12-12	3/4	19,0	12	30X1,5	60,0	60,0	32,0
A55A40-16-16	1	25,4	16	38X1,5	68,0	69,0	46,0
A55A40-20-20	1.1/4	31,8	20	45X1,5	68,0	85,0	50,0

SERIE 550930/550940: ESTREMITA' TUBOLARE METRICA RSL/RSS DIN 2353




Codice	DI Tubo in	DI Tubo mm	Dash	DE Tubo mm	C Cut-off mm
550930-03-03	3/16	4,8	03	6L	27,8
550940-03-03	3/16	4,8	03	8S	29,8
550930-03-04	1/4	6,4	04	6L	28,3
550930-04-04	1/4	6,4	04	8L	30,2
550940-04-04	1/4	6,4	04	10S	32,2
550930-06-04	1/4	6,4	04	12L	30,8
550930-05-05	5/16	7,9	05	10L	29,2
550940-05-05	5/16	7,9	05	12S	32,7
550930-05-06	3/8	9,5	06	10L	30,3
550930-06-06	3/8	9,5	06	12L	29,3
550940-06-06	3/8	9,5	06	14S	35,8
550930-08-06	3/8	9,5	06	15L	34,8
550930-06-08	1/2	12,7	08	12L	33,5
550940-06-08	1/2	12,7	08	14S	36,1
550930-08-08	1/2	12,7	08	15L	32,1
550940-08-08	1/2	12,7	08	16S	37,5
550930-10-08	1/2	12,7	08	18L	36,0
550930-10-10	5/8	15,9	10	18L	34,2
550940-10-10	5/8	15,9	10	20S	44,2
550930-12-10	5/8	15,9	10	22L	37,2
550940-10-12	3/4	19,0	12	20S	45,5
550930-12-12	3/4	19,0	12	22L	36,5
550940-12-12	3/4	19,0	12	25S	48,5
550940-12-16	1	25,4	16	25S	51,4
550930-16-16	1	25,4	16	28L	40,4
550940-16-16	1	25,4	16	30S	53,4
550940-20-16	1	25,4	16	38S	59,4
550940-16-20	1 1/4	31,8	20	30S	55,0
550930-20-20	1 1/4	31,8	20	35L	48,0
550940-20-20	1 1/4	31,8	20	38S	61,0
550940-20-24	1 1/2	38,1	24	38S	62,0
550930-24-24	1 1/2	38,1	24	42L	52,0

SERIE 559490/559500: ESTREMITA' TUBOLARE METRICA 45° RSL/RSS DIN 2353

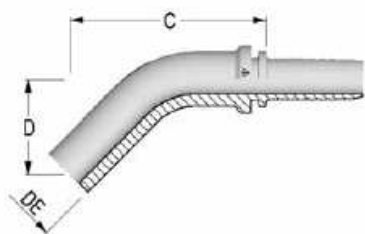


Codice	DI Tubo in	DI Tubo mm	Dash	DE Tubo mm	C Cut-off mm	D Drop mm
559490-03-04	1/4	6,4	04	6L	44,2	22,0
559490-04-04	1/4	6,4	04	8L	43,2	23,0
559500-04-04	1/4	6,4	04	10S	45,5	24,0
559490-05-05	5/16	7,9	05	10L	44,0	24,0
559500-05-05	5/16	7,9	05	12S	49,0	26,0
559490-06-05	5/16	7,9	05	12L	52,2	28,0
559490-05-06	3/8	9,5	06	10L	46,3	24,0
559490-06-06	3/8	9,5	06	12L	52,8	28,0
559500-06-06	3/8	9,5	06	14S	53,0	28,0
559490-08-08	1/2	12,7	08	15L	57,0	28,5
559500-08-08	1/2	12,7	08	16S	63,5	32,0
559490-10-08	1/2	12,7	08	18L	65,0	30,5
559490-10-10	5/8	15,9	10	18L	65,0	30,5
559500-10-10	5/8	15,9	10	20S	73,0	38,0
559490-12-10	5/8	15,9	10	22L	89,2	35,0
559490-12-12	3/4	19,0	12	22L	74,5	47,0
559500-12-12	3/4	19,0	12	25S	83,0	44,0
559490-16-16	1	25,4	16	28L	83,0	44,0
559500-16-16	1	25,4	16	30S	125,5	46,1

SERIE 559390/559400: ESTREMITA' TUBOLARE METRICA 90° RSL/RSS DIN 2353




Codice	DI Tubo in	DI Tubo mm	Dash	DE Tubo mm	C Cut-off mm	D Drop mm
559400-02-03	3/16	4,8	03	6S	22,0	34,0
559390-03-03	3/16	4,8	03	6L	25,0	36,0
559390-03-04	1/4	6,4	04	6L	24,0	36,0
559390-04-04	1/4	6,4	04	8L	27,0	44,0
559400-04-04	1/4	6,4	04	10S	30,0	42,0
559390-06-04	1/4	6,4	04	12L	36,0	50,0
559390-04-05	5/16	7,9	05	8L	28,0	46,0
559390-05-05	5/16	7,9	05	10L	30,0	48,5
559400-05-05	5/16	7,9	05	12S	36,0	55,0
559400-04-06	3/8	9,5	06	10S	33,2	47,0
559390-05-06	3/8	9,5	06	10L	26,5	42,0
559390-06-06	3/8	9,5	06	12L	36,5	50,0
559400-06-06	3/8	9,5	06	14S	37,5	50,0
559390-08-06	3/8	9,5	06	15L	37,5	51,0
559390-08-08	1/2	12,7	08	15L	39,0	52,0
559400-08-08	1/2	12,7	08	16S	45,0	59,0
559390-10-08	1/2	12,7	08	18L	50,5	59,0
559390-10-10	5/8	15,9	10	18L	48,0	58,0
559400-10-10	5/8	15,9	10	20S	58,5	70,0
559390-12-10	5/8	15,9	10	22L	49,5	64,0
559400-10-12	3/4	19,0	12	20S	61,0	70,0
559390-12-12	3/4	19,0	12	22L	53,0	67,5
559400-12-12	3/4	19,0	12	25S	66,0	85,0
559390-12-16	1	25,4	16	22L	61,0	78,0
559400-12-16	1	25,4	16	25S	72,9	98,5
559390-16-16	1	25,4	16	28L	72,9	89,5
559400-16-16	1	25,4	16	30S	72,9	102,5
559390-16-20	1 1/4	31,8	20	28L	80,0	95,0
559390-20-20	1 1/4	31,8	20	35L	89,0	106,5

SERIE 55A170: OCCHIO METRICO

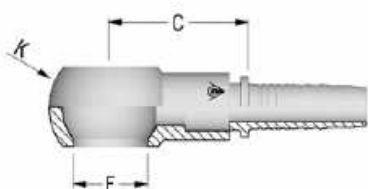


Codice	DI Tubo in	DI Tubo mm	Dash	DE Tubo mm	C Cut-off mm	K mm
55A170-03-04	1/4	6,4	04	10x1,5	25,0	17,0
55A170-04-04	1/4	6,4	04	12x1,5	28,5	20,0
55A170-05-04	1/4	6,4	04	14x1,5	27,5	24,0
55A170-05-05	5/16	7,9	05	14x1,5	27,5	24,0
55A170-05-06	3/8	9,5	06	14x1,5	27,5	24,0
55A170-06-06	3/8	9,5	06	16x1,5	30,5	28,0
55A170-08-06	3/8	9,5	06	18x1,5	31,5	32,0
55A170-08-08	1/2	12,7	08	18x1,5	32,0	32,0
55A170-10-10	5/8	15,9	10	20x1,5	34,0	36,0
55A170-12-08	1/2	12,7	08	22x1,5	35,0	39,0
55A170-12-10	5/8	15,9	10	22x1,5	35,0	39,0
55A170-20-12	3/4	19,0	12	26x1,5	38,5	46,0
55A170-24-16	1	25,4	16	30x1,5	42,5	54,0

SERIE A55100: FEMMINA FK PER IDROPULTRICE

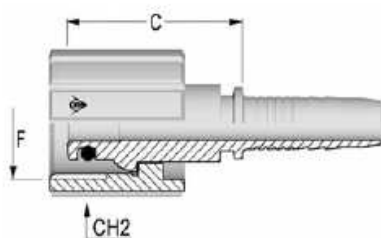


Codice	DI Tubo in	DI Tubo mm	Dash	F Filetto mm	C Cut-off mm	CH2 mm
A55100-05-04	1/4	6,4	04	22x1,5	34,0	27,0
A55100-05-05	5/16	7,9	05	22x1,5	34,0	27,0
A55100-05-06	3/8	9,5	06	22x1,5	34,0	27,0

SERIE 550200: MASCHIO JIC SV. 37°

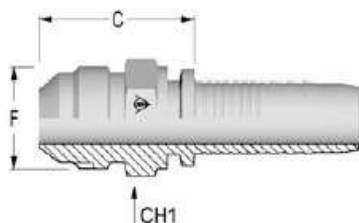

Codice	DI Tubo in	DI Tubo mm	Dash	F Filetto in-TPI	F Filetto Dash	C Cut-off mm	CH1 mm
550200-04-03	3/16	4,8	03	7/16-20	04	24,8	12,0
550200-04-04	1/4	6,4	04	7/16-20	04	25,3	12,0
550200-05-04	1/4	6,4	04	1/2-20	05	26,3	14,0
550200-06-04	1/4	6,4	04	9/16-18	06	26,3	17,0
550200-05-05	5/16	7,9	05	1/2-20	05	26,3	14,0
550200-06-05	5/16	7,9	05	9/16-18	06	26,3	17,0
550200-06-06	3/8	9,5	06	9/16-18	06	26,3	17,0
550200-08-06	3/8	9,5	06	3/4-16	08	29,0	19,0
550200-10-06	3/8	9,5	06	7/8-14	10	33,6	24,0
550200-08-08	1/2	12,7	08	3/4-16	08	29,8	19,0
550200-10-08	1/2	12,7	08	7/8-14	10	34,4	24,0
550200-12-08	1/2	12,7	08	1 1/16-12	12	37,0	27,0
550200-10-10	5/8	15,9	10	7/8-14	10	34,4	24,0
550200-12-10	5/8	15,9	10	1 1/16-12	12	37,0	27,0
550200-12-12	3/4	19,0	12	1 1/16-12	12	37,5	27,0
550200-14-12	3/4	19,0	12	1 3/16-12	14	38,0	32,0
550200-16-12	3/4	19,0	12	1 5/16-12	16	41,7	36,0
550200-12-16	1	25,4	16	1 1/16-12	12	42,5	27,0
550200-16-16	1	25,4	16	1 5/16-12	16	42,5	36,0
550200-20-16	1	25,4	16	1 5/8-12	20	46,7	46,0
550200-20-20	1 1/4	31,8	20	1 5/8-12	20	48,3	46,0
550200-24-20	1 1/4	31,8	20	1 7/8-12	24	53,0	50,0
550200-24-24	1 1/2	38,1	24	1 7/8-12	24	53,0	50,0
550200-32-32	2	50,8	32	2 1/2-12	32	60,0	65,0


SERIE A55005: FEMMINA JIC SV. 37°

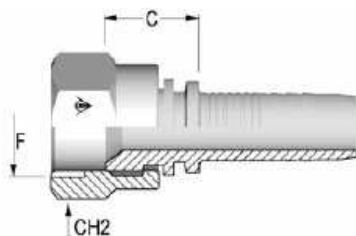

Codice	DI Tubo in	DI Tubo mm	Dash	F Filetto in-TPI	F Filetto Dash	C Cut-off mm	CH2 mm
A55005-04-03*	3/16	4,8	03	7/16-20	04	14,3	16,0
A55005-04-04*	1/4	6,4	04	7/16-20	04	14,2	16,0
A55005-05-04*	1/4	6,4	04	1/2-20	05	15,2	17,0
A55005-06-04*	1/4	6,4	04	9/16-18	06	15,2	19,0
A55005-05-05*	5/16	7,9	05	1/2-20	05	15,3	17,0
A55005-06-05*	5/16	7,9	05	9/16-18	06	15,2	19,0
A55005-06-06*	3/8	9,5	06	9/16-18	06	15,3	19,0
A55005-08-06***	3/8	9,5	06	3/4-16	08	18,0	25,0
A55005-10-06*	3/8	9,5	06	7/8-14	10	20,8	27,0
A55005-08-08*	1/2	12,7	08	3/4-16	08	18,5	25,0
A55005-10-08*	1/2	12,7	08	7/8-14	10	20,0	27,0
A55005-12-08*	1/2	12,7	08	1 1/16-12	12	22,0	32,0
A55005-10-10*	5/8	15,9	10	7/8-14	10	20,2	27,0
A55005-12-10*	5/8	15,9	10	1 1/16-12	12	19,7	32,0
A55005-10-12*	3/4	19,0	12	7/8-14	10	20,5	27,0
A55005-12-12*	3/4	19,0	12	1 1/16-12	12	20,5	32,0
A55005-14-12*	3/4	19,0	12	1 3/16-12	14	20,0	36,0
A55005-16-12*	3/4	19,0	12	1 5/16-12	16	23,0	38,0
A55005-16-16*	1	25,4	16	1 5/16-12	16	23,4	38,0
A55005-20-16**	1	25,4	16	1 5/8-12	20	25,9	50,0
A55005-20-20**	1 1/4	31,8	20	1 5/8-12	20	27,5	50,0
A55005-24-20**	1 1/4	31,8	20	1 7/8-12	24	28,5	55,0
A55005-24-24**	1 1/2	38,1	24	1 7/8-12	24	28,5	55,0
A55005-32-32**	2	50,8	32	2 1/2-12	32	29,0	70,0

*Dado pinzato **Dado spinato ***Dado a battuta


SERIE A55064: FEMMINA 45° JIC SV. 37°

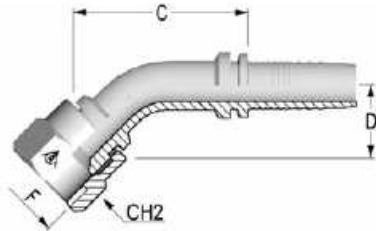

Codice	DI Tubo in	DI Tubo mm	Dash	F Filetto in-TPI	F Filetto Dash	C Cut-off mm	D Drop mm	CH2 mm
A55064-04-03*	3/16	4,8	03	7/16-20	04	30,3	10,0	16,0
A55064-04-04*	1/4	6,4	04	7/16-20	04	36,7	10,0	16,0
A55064-05-04*	1/4	6,4	04	1/2-20	05	35,3	10,6	17,0
A55064-06-04*	1/4	6,4	04	9/16-18	06	39,4	11,7	19,0
A55064-05-05*	5/16	7,9	05	1/2-20	05	39,5	11,3	17,0
A55064-06-05*	5/16	7,9	05	9/16-18	06	41,5	11,3	19,0
A55064-06-06*	3/8	9,5	06	9/16-18	06	42,3	11,0	19,0
A55064-08-06*	3/8	9,5	06	3/4-16	08	44,3	15,0	25,0
A55064-08-08*	1/2	12,7	08	3/4-16	08	51,7	15,7	25,0
A55064-10-08*	1/2	12,7	08	7/8-14	10	52,0	16,0	27,0
A55064-12-08*	1/2	12,7	08	1 1/16-12	12	47,5	20,5	32,0
A55064-10-10*	5/8	15,9	10	7/8-14	10	51,7	19,0	27,0
A55064-12-10*	5/8	15,9	10	1 1/16-12	12	60,9	21,2	32,0
A55064-12-12*	3/4	19,0	12	1 1/16-12	12	67,4	21,4	32,0
A55064-14-12*	3/4	19,0	12	1 3/16-12	14	82,5	23,0	36,0
A55064-16-12*	3/4	19,0	12	1 5/16-12	16	70,0	26,0	38,0
A55064-16-16*	1	25,4	16	1 5/16-12	16	77,9	24,0	38,0
A55064-20-16**	1	25,4	16	1 5/8-12	20	81,9	37,0	50,0
A55064-20-20**	1 1/4	31,8	20	1 5/8-12	20	97,5	37,0	50,0
A55064-24-24**	1 1/2	38,1	24	1 7/8-12	24	108,0	43,0	55,0
A55064-32-32**	2	50,8	32	2 1/2	32	156,0	59,0	70,0

*Dado pinzato **Dado spinato ***Dado a battuta


SERIE A55054: FEMMINA 90° JIC SV. 37°



Codice	DI Tubo in	DI Tubo mm	Dash	F Filetto in-TPI	F Filetto Dash	C Cut-off mm	D Drop mm	CH2 mm
A55054-04-03*	3/16	4,8	03	7/16-20	04	36,3	32,0	16,0
A55054-04-04*	1/4	6,4	04	7/16-20	04	33,7	32,0	16,0
A55054-05-04*	1/4	6,4	04	1/2-20	05	26,7	30,0	17,0
A55054-06-04*	1/4	6,4	04	9/16-18	06	31,2	38,0	19,0
A55054-05-05*	5/16	7,9	05	1/2-20	05	34,7	35,0	17,0
A55054-06-05*	5/16	7,9	05	9/16-18	06	34,7	35,0	19,0
A55054-06-06*	3/8	9,5	06	9/16-18	06	32,3	35,0	19,0
A55054-08-06*	3/8	9,5	06	3/4-16	08	38,3	41,0	25,0
A55054-08-08*	1/2	12,7	08	3/4-16	08	37,0	40,0	25,0
A55054-10-08*	1/2	12,7	08	7/8-14	10	38,0	47,0	27,0
A55054-10-10*	5/8	15,9	10	7/8-14	10	50,2	47,0	27,0
A55054-12-10*	5/8	15,9	10	1 1/16-12	12	48,2	54,0	32,0
A55054-12-12*	3/4	19,0	12	1 1/16-12	12	52,0	54,0	32,0
A55054-16-12*	3/4	19,0	12	1 5/16-12	16	53,5	72,0	38,0
A55054-16-16*	1	25,4	16	1 5/16-12	16	73,4	71,5	38,0
A55054-20-16**	1	25,4	16	1 5/8-12	20	72,4	78,0	50,0
A55054-20-20**	1 1/4	31,8	20	1 5/8-12	20	83,0	78,0	50,0
A55054-24-20**	1 1/4	31,8	20	1 7/8-12	24	94,0	86,0	55,0
A55054-24-24**	1 1/2	38,1	24	1 7/8-12	24	103,0	86,0	55,0
A55054-32-32**	2	50,8	32	2 1/2-12	32	147,0	140,0	70,0


*Dado pinzato **Dado spinato ***Dado a battuta

SERIE 550170: MASCHIO NPTF SV. 60°




Codice	DI Tubo in	DI Tubo mm	Dash	F Filetto in-TPI	F Filetto Dash	C Cut-off mm	CH1 mm
550170-02-03	3/16	4,8	03	1/8-27	02	20,8	12,0
550170-02-04	1/4	6,4	04	1/8-27	02	22,3	14,0
550170-04-04	1/4	6,4	04	1/4-18	04	26,3	17,0
550170-06-04	1/4	6,4	04	3/8-18	06	26,3	19,0
550170-08-04	1/4	6,4	04	1/2-14	08	33,3	22,0
550170-04-05	5/16	7,9	05	1/4-18	04	26,3	17,0
550170-06-05	5/16	7,9	05	3/8-18	06	26,3	19,0
550170-04-06	3/8	9,5	06	1/4-18	04	26,3	17,0
550170-06-06	3/8	9,5	06	3/8-18	06	26,3	19,0
550170-08-06	3/8	9,5	06	1/2-14	08	32,3	22,0
550170-06-08	1/2	12,7	08	3/8-18	06	28,1	19,0
550170-08-08	1/2	12,7	08	1/2-14	08	34,0	22,0
550170-12-08	1/2	12,7	08	3/4-14	12	34,0	27,0
550170-08-10	5/8	15,9	10	1/2-14	08	34,1	24,0
550170-12-10	5/8	15,9	10	3/4-14	12	34,0	27,0
550170-08-12	3/4	19,0	12	1/2-14	08	34,6	27,0
550170-12-12	3/4	19,0	12	3/4-14	12	34,6	27,0
550170-16-12	3/4	19,0	12	1-11	16	42,6	36,0
550170-12-16	1	25,4	16	3/4-14	12	38,4	36,0
550170-16-16	1	25,4	16	1-11	16	43,4	36,0
550170-20-16	1	25,4	16	1 1/4-11	20	47,4	46,0
550170-20-20	1 1/4	31,8	20	1 1/4-11	20	49,0	46,0
550170-24-20	1 1/4	31,8	20	1 1/2-11	24	50,0	50,0
550170-24-24	1 1/2	38,1	24	1 1/2-11	24	50,0	50,0
550170-32-24	1 1/2	38,1	24	2-11	32	52,0	65,0
550170-32-32	2	50,8	32	2-11	32	52,0	65,0

SERIE 55A290: MASCHIO ORFS



Codice	DI Tubo in	DI Tubo mm	Dash	F Filetto in-TPI	F Filetto Dash	C Cut-off mm	CH1 mm
55A290-04-04	1/4	6,4	04	9/16-18	04	25,3	17,0
55A290-06-04	1/4	6,4	04	11/16-16	06	26,5	19,0
55A290-06-06	3/8	9,5	06	11/16-16	06	26,5	19,0
55A290-08-06	3/8	9,5	06	13/16-16	08	26,3	22,0
55A290-10-06	3/8	9,5	06	1-14	10	29,8	27,0
55A290-08-08	1/2	12,7	08	13/16-16	08	29,9	22,0
55A290-10-08	1/2	12,7	08	1-14	10	30,6	27,0
55A290-12-08	1/2	12,7	08	1 3/16-12	12	37,1	32,0
55A290-10-10	5/8	15,8	10	1-14	10	30,6	27,0
55A290-12-10	5/8	15,8	10	1 3/16-12	12	32,1	32,0
55A290-10-12	3/4	19,0	12	1-14	10	31,1	27,0
55A290-12-12	3/4	19,0	12	1 3/16-12	12	37,6	32,0
55A290-16-12	3/4	19,0	12	1 7/16-12	16	39,1	41,0
55A290-16-16	1	25,4	16	1 7/16-12	16	39,9	38,0
55A290-20-16	1	25,4	16	1 11/16-12	20	39,9	46,0
55A290-20-20	1 1/4	31,8	20	1 11/16-12	20	41,5	46,0


SERIE A55A26: FEMMINA ORFS

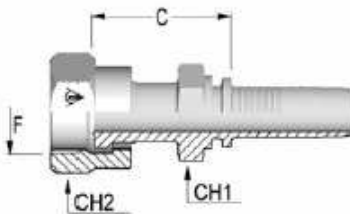

Codice	DI Tubo in	DI Tubo mm	Dash	F Filetto in-TPI	F Filetto Dash	C Cut-off mm	CH1 mm	CH2 mm
A55A26-04-04*	1/4	6,4	04	9/16-18	04	27,5	14,0	17,0
A55A26-06-04*	1/4	6,4	04	11/16-16	06	30,0	17,0	22,0
A55A26-06-05*	5/16	7,9	05	11/16-16	06	30,0	17,0	22,0
A55A26-06-06*	3/8	9,5	06	11/16-16	06	30,0	17,0	22,0
A55A26-08-06*	3/8	9,5	06	13/16-16	08	35,0	22,0	24,0
A55A26-06-08*	1/2	12,7	08	11/16-16	06	31,0	19,0	22,0
A55A26-08-08*	1/2	12,7	08	13/16-16	08	36,0	22,0	24,0
A55A26-10-08*	1/2	12,7	08	1-14	10	40,0	24,0	30,0
A55A26-12-08*	1/2	12,7	08	1 3/16-12	12	42,0	32,0	36,0
A55A26-10-10*	5/8	15,8	10	1-14	10	40,0	24,0	30,0
A55A26-12-10*	5/8	15,8	10	1 3/16-12	12	42,0	30,0	36,0
A55A26-10-12*	3/4	19,0	12	1-14	10	40,0	27,0	30,0
A55A26-12-12*	3/4	19,0	12	1 3/16-12	12	42,0	30,0	36,0
A55A26-16-12*	3/4	19,0	12	1 7/16-12	16	46,0	36,0	41,0
A55A26-16-14*	7/8	22,2	14	1 7/16-12	16	48,0	36,0	41,0
A55A26-12-16*	1	25,4	16	1 3/16-12	12	45,0	32,0	36,0
A55A26-16-16*	1	25,4	16	1 7/16-12	16	46,0	36,0	41,0
A55A26-20-16*	1	25,4	16	1 11/16-12	20	48,0	41,0	50,0
A55A26-20-20*	1 1/4	31,8	20	1 11/16-12	20	50,0	41,0	50,0
A55A26-24-24*	1 1/2	38,1	24	2-12	24	55,0	50,0	60,0

*Dado pinzato **Dado spinato ***Dado a battuta


SERIE A55A27: FEMMINA 45° ORFS



Codice	DI Tubo in	DI Tubo mm	Dash	F Filetto in-TPI	F Filetto Dash	C Cut-off mm	D Drop mm	CH2 mm
A55A27-04-04***	1/4	6,4	04	9/16-18	04	34,7	11,0	17,0
A55A27-06-04***	1/4	6,4	04	11/16-16	06	36,2	11,0	22,0
A55A27-06-05***	5/16	7,9	05	11/16-16	06	41,7	12,0	22,0
A55A27-06-06***	3/8	9,5	06	11/16-16	06	41,3	12,0	22,0
A55A27-08-06***	3/8	9,5	06	13/16-16	08	46,3	15,0	24,0
A55A27-08-08*	1/2	12,7	08	13/16-16	08	47,0	16,0	24,0
A55A27-10-08***	1/2	12,7	08	1-14	10	55,5	16,5	30,0
A55A27-10-10***	5/8	15,9	10	1-14	10	55,7	17,0	30,0
A55A27-12-10***	5/8	15,9	10	13/16-12	12	61,2	21,0	36,0
A55A27-12-12***	3/4	19,0	12	13/16-12	12	63,0	21,0	36,0
A55A27-16-12***	3/4	19,0	12	17/16-12	16	70,0	24,0	41,0
A55A27-16-16***	1	25,4	16	17/16-12	16	79,9	26,0	41,0
A55A27-20-16***	1	25,4	16	11/16-12	20	84,9	26,0	50,0
A55A27-20-20***	1 1/4	31,8	20	11/16-12	20	90,0	26,0	50,0
A55A27-24-24***	1 1/2	38,1	24	2-12	24	105,1	27,9	57,0

*Dado pinzato **Dado spinato ***Dado a battuta


SERIE A55A28: FEMMINA 90° ORFS



Codice	DI Tubo in	DI Tubo mm	Dash	F Filetto in-TPI	F Filetto Dash	C Cut-off mm	D Drop mm	CH2 mm
A55A28-04-04***	1/4	6,4	04	9/16-18	04	33,2	32,0	17,0
A55A28-06-04***	1/4	6,4	04	11/16-16	06	37,2	38,0	22,0
A55A28-06-05***	5/16	7,9	05	11/16-16	06	41,7	34,0	22,0
A55A28-06-06***	3/8	9,5	06	11/16-16	06	41,8	38,0	22,0
A55A28-08-06***	3/8	9,5	06	13/16-16	08	44,8	41,0	24,0
A55A28-08-08*	1/2	12,7	08	13/16-16	08	38,0	43,5	24,0
A55A28-10-08***	1/2	12,7	08	1-14	10	49,0	47,0	30,0
A55A28-10-10***	5/8	15,9	10	1-14	10	55,2	44,0	30,0
A55A28-12-12***	3/4	19,0	12	13/16-12	12	61,5	58,0	36,0
A55A28-16-16***	1	25,4	16	17/16-12	16	81,9	66,0	41,0
A55A28-20-16***	1	25,4	16	11/16-12	20	81,9	78,0	50,0
A55A28-20-20***	1 1/4	31,8	20	11/16-12	20	97,0	78,0	50,0
A55A28-24-24***	1 1/2	38,1	24	2-12	24	110,0	84,0	57,0


*Dado pinzato **Dado spinato ***Dado a battuta

SERIE 550250: FLANGIA 3000 SAE J 518 CODE 61

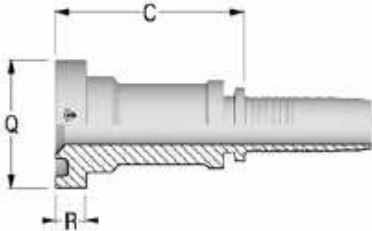


Codice	DI Tubo in	DI Tubo mm	Dash	Q Dim. Fl. mm	R Sp. Fl. mm	Q Dim. Fl. Dash	C Cut-off mm
550250-08-08	1/2	12,7	08	30,2	6,5	08	41,0
550250-12-08	1/2	12,7	08	38,0	6,5	12	42,0
550250-12-10	5/8	15,9	10	38,0	6,5	12	42,2
550250-12-12	3/4	19,0	12	38,0	6,5	12	42,5
550250-16-12	3/4	19,0	12	44,5	8,0	16	50,5
550250-16-16	1	25,4	16	44,5	8,0	16	51,4
550250-20-16	1	25,4	16	50,8	8,0	20	53,9
550250-20-20	1.1/4	31,8	20	50,8	8,0	20	55,5
550250-24-20	1.1/4	31,8	20	60,3	8,0	24	58,5
550250-24-24	1.1/2	38,1	24	60,3	8,0	24	58,5
550250-32-24	1.1/2	38,1	24	71,5	9,5	32	70,0
550250-32-32	2	50,8	32	71,5	9,5	32	70,0
550250-40-40	2.1/2	63,5	40	84,1	9,5	40	117,0
550250-48-48	3	76,2	48	101,6	9,5	48	135,0
550250-64-64	4	101,6	64	127,0	11,2	64	150,0

SERIE 550680: FLANGIA 45° 3000 SAE J 518 CODE 61

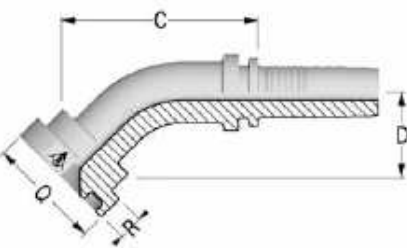


Codice	DI Tubo in	DI Tubo mm	Dash	Q Dim. Fl. mm	R Sp. Fl. mm	Q Dim. Fl. Dash	C Cut-off mm	D Drop mm
550680-08-08	1/2	12,7	08	30,2	6,5	08	51,5	22,0
550680-12-08	1/2	12,7	08	38,0	6,5	12	60,0	26,0
550680-12-12	3/4	19,0	12	38,0	6,5	12	75,5	32,0
550680-16-12	3/4	19,0	12	44,5	8,0	16	78,0	29,0
550680-16-16	1	25,4	16	44,5	8,0	16	84,5	33,5
550680-20-16	1	25,4	16	50,8	8,0	20	84,0	36,0
550680-20-20	1.1/4	31,8	20	50,8	8,0	20	97,5	37,5
550680-24-20	1.1/4	31,8	20	60,3	8,0	24	106,0	38,0
550680-24-24	1.1/2	38,1	24	60,3	8,0	24	113,5	51,0
550680-32-24	1.1/2	38,1	24	71,5	9,5	32	135,5	55,5
550680-32-32	2	50,8	32	71,5	9,5	32	139,0	47,5
550680-40-40	2.1/2	63,5	40	84,1	9,5	40	162,0	115,0
550680-48-48	3	76,2	48	101,6	9,5	48	196,0	135,0
550680-64-64	4	101,6	64	127,0	11,2	64	233,5	161,0

SERIE 550580: FLANGIA 90° 3000 SAE J 518 CODE 61

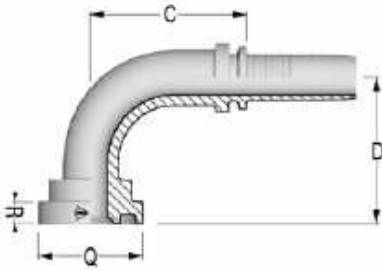


Codice	DI Tubo in	DI Tubo mm	Dash	Q Dim. Fl. mm	R Sp. Fl. mm	Q Dim. Fl. Dash	C Cut-off mm	D Drop mm
550580-08-08	1/2	12,7	08	30,2	6,5	08	45,0	42,0
550580-12-08	1/2	12,7	08	38,0	6,5	12	46,0	51,0
550580-12-10	5/8	15,9	10	38,0	6,5	12	49,0	51,0
550580-12-12	3/4	19,0	12	38,0	6,5	12	61,0	60,0
550580-16-12	3/4	19,0	12	44,5	8,0	16	70,0	64,5
550580-16-16	1	25,4	16	44,5	8,0	16	73,5	67,0
550580-20-16	1	25,4	16	50,8	8,0	20	77,5	71,0
550580-20-20	1.1/4	31,8	20	50,8	8,0	20	98,0	84,0
550580-24-20	1.1/4	31,8	20	60,3	8,0	24	99,5	87,5
550580-24-24	1.1/2	38,1	24	60,3	8,0	24	110,0	91,0
550580-32-24	1.1/2	38,1	24	71,5	9,5	32	114,0	115,0
550580-32-32	2	50,8	32	71,5	9,5	32	143,0	130,0
550580-40-40	2.1/2	63,5	40	84,1	9,5	40	137,0	170,0
550580-48-48	3	76,2	48	101,6	9,5	48	169,5	200,0
550580-64-64	4	101,6	64	127,0	11,2	64	207,5	252,0

SERIE 551590: FLANGIA 6000 SAE J 518 CODE 62

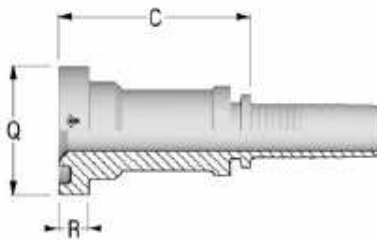


Codice	DI Tubo in	DI Tubo mm	Dash	Q Dim. Fl. mm	R Sp. Fl. mm	Q Dim. Fl. Dash	C Cut-off mm
551590-08-08	1/2	12,7	08	31,8	8,0	08	47,0
551590-12-08	1/2	12,7	08	41,3	9,0	12	52,0
551590-12-12	3/4	19,0	12	41,3	9,0	12	52,5
551590-16-12	3/4	19,0	12	47,6	9,5	16	55,5
551590-16-16	1	25,4	16	47,6	9,5	16	56,4
551590-20-16	1	25,4	16	54,0	10,5	20	63,4
551590-20-20	1.1/4	31,8	20	54,0	10,5	20	83,0
551590-24-20	1.1/4	31,8	20	63,5	12,5	24	71,0
551590-24-24	1.1/2	38,1	24	63,5	12,5	24	101,0
551590-32-24	1.1/2	38,1	24	79,5	12,5	32	76,0
551590-32-32	2	50,8	32	79,5	12,5	32	76,0

SERIE 551610: FLANGIA 45° 6000 SAE J 518 CODE 62

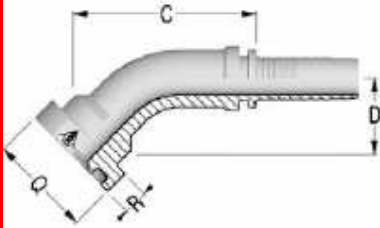


Codice	DI Tubo in	DI Tubo mm	Dash	Q Dim. Fl. mm	R Sp. Fl. mm	Q Dim. Fl. Dash	C Cut-off mm	D Drop mm
551610-08-08	1/2	12,7	08	31,8	8,0	08	57,5	23,0
551610-12-08	1/2	12,7	08	41,3	9,0	12	58,0	30,5
551610-12-12	3/4	19,0	12	41,3	9,0	12	74,0	31,0
551610-16-12	3/4	19,0	12	47,6	9,5	16	81,0	33,5
551610-16-16	1	25,4	16	47,6	9,5	16	97,0	36,0
551610-20-16	1	25,4	16	54,0	10,5	20	96,0	39,0
551610-20-20	1.1/4	31,8	20	54,0	10,5	20	113,5	40,0
551610-24-20	1.1/4	31,8	20	63,5	12,5	24	114,5	45,5
551610-24-24	1.1/2	38,1	24	63,5	12,5	24	99,0	45,0
551610-32-24	1.1/2	38,1	24	79,5	12,5	32	133,5	57,5
551610-32-32	2	50,8	32	79,5	12,5	32	156,0	60,0

SERIE 551600: FLANGIA 90° 6000 SAE J 518 CODE 62

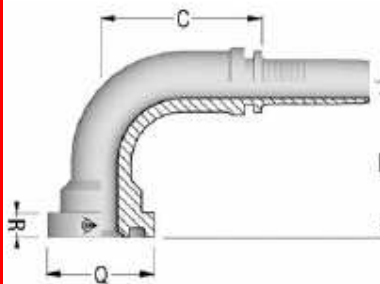

Codice	DI Tubo in	DI Tubo mm	Dash	Q Dim. Fl. mm	R Sp. Fl. mm	Q Dim. Fl. Dash	C Cut-off mm	D Drop mm
551600-08-08	1/2	12,7	08	31,8	8,0	08	48,0	46,0
551600-12-08	1/2	12,7	08	41,3	9,0	12	48,0	54,0
551600-12-12	3/4	19,0	12	41,3	9,0	12	63,0	61,0
551600-16-12	3/4	19,0	12	47,6	9,5	16	52,5	66,0
551600-16-16	1	25,4	16	47,6	9,5	16	78,5	75,0
551600-20-16	1	25,4	16	54,0	10,5	20	77,5	78,0
551600-20-20	1.1/4	31,8	20	54,0	10,5	20	97,0	89,0
551600-24-20	1.1/4	31,8	20	63,5	12,5	24	98,0	94,0
551600-24-24	1.1/2	38,1	24	63,5	12,5	24	99,0	105,0
551600-32-24	1.1/2	38,1	24	79,5	12,5	32	114,0	123,0
551600-32-32	2	50,8	32	79,5	12,5	32	143,0	132,0


SERIE 190120: MASCHIO BSPP CILINDRICO SV.60°

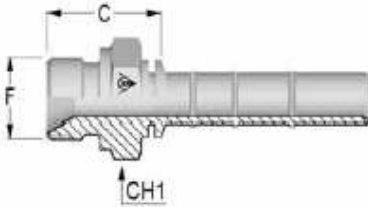

POWERTRAK

Codice	DI Tubo in	DI Tubo mm	Dash	F Filetto in-TPI	F Filetto Dash	C Cut-off mm	CH1 mm
190120-12-12	3/4	19,0	12	3/4-14	12	39,0	32,0
190120-16-12	3/4	19,0	12	1-11	16	44,5	41,0
190120-16-16	1	25,4	16	1-11	16	44,5	41,0
190120-20-16	1	25,4	16	1.1/4-11	20	48,0	50,0
190120-20-20	1.1/4	31,8	20	1.1/4-11	20	48,0	50,0
190120-24-24	1.1/2	38,1	24	1.1/2-11	24	52,0	55,0
190120-32-32	2	50,8	32	2-11	32	59,0	70,0


SERIE A19001: FEMMINA BSPP SV. 60°

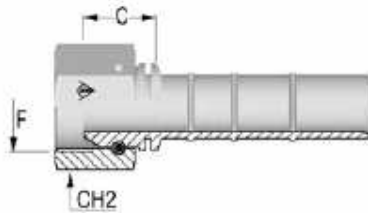

POWERTRAK

Codice	DI Tubo in	DI Tubo mm	Dash	F Filetto in-TPI	F Filetto Dash	C Cut-off mm	CH2 mm
A19001-08-08	1/2	12,7	08	1/2-14	08	24,5	27,0
A19001-12-12	3/4	19,0	12	3/4-14	12	27,0	32,0
A19001-16-12	3/4	19,0	12	1-11	16	29,5	41,0
A19001-16-16	1	25,4	16	1-11	16	29,5	41,0
A19001-20-16	1	25,4	16	1.1/4-11	20	33,0	50,0
A19001-20-20	1.1/4	31,8	20	1.1/4-11	20	33,0	50,0
A19001-24-24	1.1/2	38,1	24	1.1/2-11	24	36,0	55,0
A19001-32-32	2	50,8	32	2-11	32	37,5	70,0


SERIE A19061: FEMMINA 45° BSPP SV. 60°

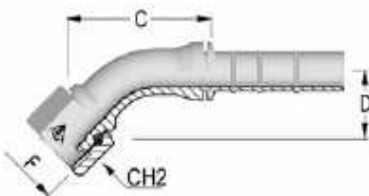

POWERTRAK

Codice	DI Tubo in	DI Tubo mm	Dash	F Filetto in-TPI	F Filetto Dash	C Cut-off mm	D Drop mm	CH2 mm
A19061-08-08	1/2	12,7	08	1/2-14	08	62,5	28,0	27,0
A19061-12-12	3/4	19,0	12	3/4-14	12	73,5	31,0	32,0
A19061-16-16	1	25,4	16	1-11	16	90,0	35,0	41,0
A19061-20-20	1.1/4	31,8	20	1.1/4-11	20	107,0	43,0	50,0
A19061-24-24	1.1/2	38,1	24	1.1/2-11	24	129,0	48,0	55,0
A19061-32-32	2	50,8	32	2-11	32	165,0	59,0	70,0


SERIE A19051: FEMMINA 90° BSPP SV. 60°

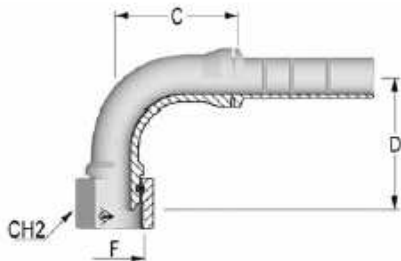

POWERTRAK

Codice	DI Tubo in	DI Tubo mm	DASH	F Filetto in-TPI	F Filetto Dash	C Cut-off mm	D Drop mm	CH2 mm
A19051-08-08	1/2	12,7	08	1/2-14	08	48,0	53,0	27,0
A19051-12-12	3/4	19,0	12	3/4-14	12	59,0	57,5	32,0
A19051-16-12	3/4	19,0	12	1-11	16	77,5	74,5	41,0
A19051-16-16	1	25,4	16	1-11	16	73,5	74,5	41,0
A19051-20-16	1	25,4	16	1.1/4-11	20	89,0	85,0	50,0
A19051-20-20	1.1/4	31,8	20	1.1/4-11	20	85,0	85,0	50,0
A19051-24-24	1.1/2	38,1	24	1.1/2-11	24	109,0	103,0	55,0
A19051-32-32	2	50,8	32	2-11	32	140,5	130,0	70,0


SERIE 190200: MASCHIO JIC SV. 37°

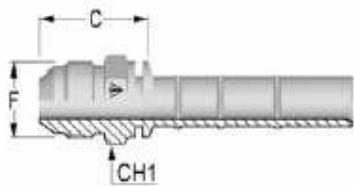

POWERTRAK

Codice	DI Tubo in	DI Tubo mm	Dash	F Filetto in-TPI	F Filetto Dash	C Cut-off mm	CH1 mm
190200-12-12	3/4	19,0	12	1.1/16-12	12	43,5	30,0
190200-16-12	3/4	19,0	12	1.5/16-12	16	46,0	36,0
190200-16-16	1	25,4	16	1.5/16-12	16	47,5	36,0
190200-20-20	1.1/4	31,8	20	1.5/8-12	20	50,0	46,0
190200-24-24	1.1/2	38,1	24	1.7/8-12	24	54,5	50,0
190200-32-32	2	50,8	32	2.1/2-12	32	63,0	65,0


SERIE A19005: FEMMINA JIC SV. 37°

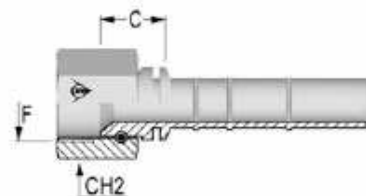

POWERTRAK

Codice	DI Tubo in	DI Tubo mm	Dash	F Filetto in-TPI	F Filetto Dash	C Cut-off mm	CH2 mm
A19005-12-12	3/4	19,0	12	1.1/16-12	12	24,5	32,0
A19005-16-12	3/4	19,0	12	1.5/16-12	16	25,5	38,0
A19005-16-16	1	25,4	16	1.5/16-12	16	26,5	38,0
A19005-20-16	1	25,4	16	1.5/8-12	20	29,0	50,0
A19005-20-20	1.1/4	31,8	20	1.5/8-12	20	29,0	50,0
A19005-24-20	1.1/4	31,8	20	1.7/8-12	24	31,5	55,0
A19005-24-24	1.1/2	38,1	24	1.7/8-12	24	31,0	55,0
A19005-32-32	2	50,8	32	2.1/2-12	32	35,5	70,0


SERIE A19064: FEMMINA 45° JIC SV. 37°

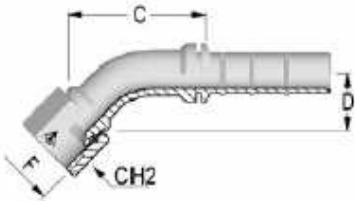

POWERTRAK

Codice	DI Tubo in	DI Tubo mm	Dash	F Filetto in-TPI	F Filetto Dash	C Cut-off mm	D Drop mm	CH2 mm
A19064-12-12	3/4	19,0	12	1.1/16-12	12	73,0	29,0	32,0
A19064-16-12	3/4	19,0	12	1.5/16-12	16	74,0	28,0	38,0
A19064-16-16	1	25,4	16	1.5/16-12	16	88,0	35,0	38,0
A19064-20-16	1	25,4	16	1.5/8-12	20	103,0	40,5	50,0
A19064-20-20	1.1/4	31,8	20	1.5/8-12	20	103,0	40,5	50,0
A19064-24-24	1.1/2	38,1	24	1.7/8-12	24	127,0	49,0	55,0
A19064-32-32	2	50,8	32	2.1/2-12	32	163,0	59,0	70,0


SERIE A19054: FEMMINA 90° JIC SV. 37°

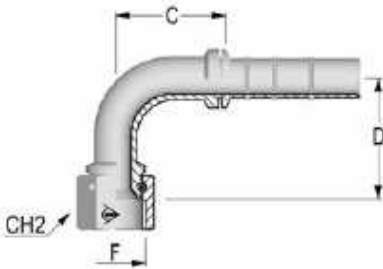

POWERTRAK

Codice	DI Tubo in	DI Tubo mm	Dash	F Filetto in-TPI	F Filetto Dash	C Cut-off mm	D Drop mm	CH2 mm
A19054-12-12	3/4	19,0	12	1.1/16-12	12	60,0	57,0	32,0
A19054-16-12	3/4	19,0	12	1.5/16-12	16	57,5	57,0	38,0
A19054-16-16	1	25,4	16	1.5/16-12	16	71,5	74,5	38,0
A19054-20-16	1	25,4	16	1.5/8-12	20	90,0	81,5	50,0
A19054-20-20	1.1/4	31,8	20	1.5/8-12	20	85,0	81,5	50,0
A19054-24-24	1.1/2	38,1	24	1.7/8-12	24	106,0	103,0	55,0
A19054-32-32	2	50,8	32	2.1/2-12	32	137,5	130,0	70,0

SERIE A19177-A19179: FEMMINA METR. DKO-S SV. 24° C/ORING DIN 3865 S. PESANTE

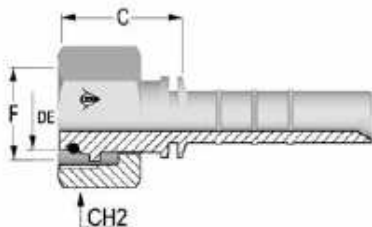


POWERTRAK

Codice	DI Tubo in	DI Tubo mm	Dash	F Filetto mm	DE Tubo mm	C Cut-off mm	CH1 mm	CH2 mm
A19179-08-08***	1/2	12,7	08	24X1,5	16S	37,5	30,0	-
A19177-10-12**	3/4	19,0	12	30x2	20S	42,0	30,0	36,0
A19179-12-12***	3/4	19,0	12	36X2	25S	43,5	41,0	-
A19179-16-12***	3/4	19,0	12	42X2	30S	46,0	50,0	-
A19177-12-16**	1	25,4	16	36x2	25S	43,5	36,0	41,0
A19179-16-16***	1	25,4	16	42X2	30S	47,0	50,0	-
A19179-20-20***	1.1/4	31,8	20	52X2	38S	51,0	60,0	-

*Dado pinzato **Dado spinato ***Dado a battuta

SERIE A19977: FEMMINA METR. 90° DKO-S SV. 24° CON ORING DIN 3865 S. PESANTE

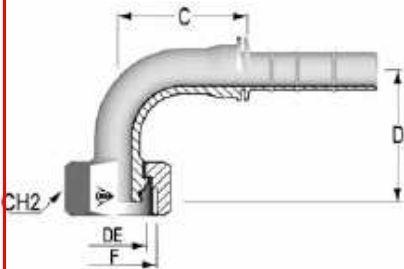


Codice	DI Tubo in	DI Tubo mm	Dash	F Filetto mm	DE Tubo mm	C Cut-off mm	D Drop mm	CH2 mm
A19977-10-12**	3/4	19,0	12	30X2	20S	60,0	64,0	36,0
A19977-12-12***	3/4	19,0	12	36x2	25S	61,0	68,0	41,0
A19977-16-16***	1	25,4	16	42x2	30S	83,5	76,0	50,0
A19977-20-20***	1.1/4	31,8	20	52x2	38S	97,0	93,0	60,0

*Dado pinzato **Dado spinato ***Dado a battuta

POWERTRAK


SERIE 190250: FLANGIA 3000 SAE J 518 CODE 61

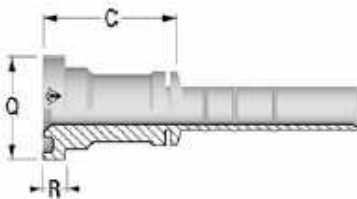

Codice	DI Tubo in	DI Tubo mm	Dash	Q Dim. Fl. mm	R Sp. Fl. mm	Q Dim. Fl. Dash	C Cut-off mm
190250-12-12	3/4	19,0	12	38,0	6,5	12	53,5
190250-16-12	3/4	19,0	12	44,5	8,0	16	56,5
190250-20-12	3/4	19,0	12	50,8	8,0	20	59,0
190250-16-16	1	25,4	16	44,5	8,0	16	54,5
190250-20-16	1	25,4	16	50,8	8,0	20	59,0
190250-16-20	1.1/4	31,8	20	44,5	8,0	16	56,0
190250-20-20	1.1/4	31,8	20	50,8	8,0	20	59,5
190250-24-20	1.1/4	31,8	20	60,3	8,0	24	61,0
190250-20-24	1.1/2	38,1	24	50,8	8,0	20	61,0
190250-24-24	1.1/2	38,1	24	60,3	8,0	24	61,0
190250-32-24	1.1/2	38,1	24	71,5	9,5	32	68,0
190250-32-32	2	50,8	32	71,5	9,5	32	65,5

POWERTRAK


SERIE 19B370: FLANGIA 45° 3000 SAE J 518 CODE 61

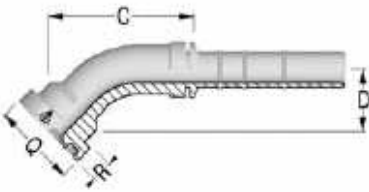

POWERTRAK

Codice	DI Tubo in	DI Tubo mm	Dash	Q Dim. Fl. mm	R Sp. Fl. mm	Q Dim. Fl. Dash	C Cut-off mm	D Drop mm
19B370-12-12	3/4	19,0	12	38,0	6,5	12	75,0	29,0
19B370-16-12	3/4	19,0	12	44,5	8,0	16	79,0	30,0
19B370-16-16	1	25,4	16	44,5	8,0	16	90,0	32,5
19B370-20-16	1	25,4	16	50,8	8,0	20	92,0	35,0
19B370-16-20	1.1/4	31,8	20	44,5	8,0	16	105,0	42,0
19B370-20-20	1.1/4	31,8	20	50,8	8,0	20	102,0	36,0
19B370-24-20	1.1/4	31,8	20	60,3	8,0	24	108,0	41,0
19B370-24-24	1.1/2	38,1	24	60,3	8,0	24	116,0	43,5
19B370-32-32	2	50,8	32	71,5	9,5	32	174,5	69,0


SERIE 19B380: FLANGIA 90° 3000 SAE J 518 CODE 61

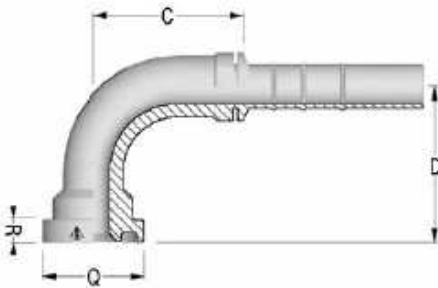

POWERTRAK

Codice	DI Tubo in	DI Tubo mm	Dash	Q Dim. Fl. mm	R Sp. Fl. mm	Q Dim. Fl. Dash	C Cut-off mm	D Drop mm
19B380-12-12	3/4	19,0	12	38,0	6,5	12	65,5	60,0
19B380-16-12	3/4	19,0	12	44,5	8,0	16	65,0	60,0
19B380-20-12	3/4	19,0	12	50,8	8,0	20	66,5	65,5
19B380-16-16	1	25,4	16	44,5	8,0	16	76,0	65,0
19B380-20-16	1	25,4	16	50,8	8,0	20	81,0	69,5
19B380-16-20	1.1/4	31,8	20	44,5	8,0	16	90,0	65,0
19B380-20-20	1.1/4	31,8	20	50,8	8,0	20	90,0	80,0
19B380-24-20	1.1/4	31,8	20	60,3	8,0	24	94,5	89,0
19B380-20-24	1.1/2	38,1	24	50,8	8,0	20	108,0	96,0
19B380-24-24	1.1/2	38,1	24	60,3	8,0	24	108,0	96,0
19B380-32-24	1.1/2	38,1	24	71,5	9,5	32	112,5	135,0
19B380-32-32	2	50,8	32	71,5	9,5	32	148,0	135,0


SERIE 19B810: FLANGIA 6000 SAE J 518 CODE 62

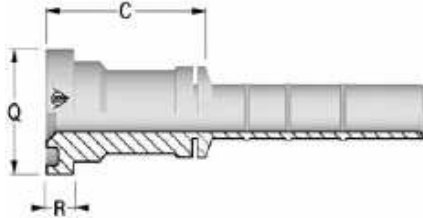

Codice	DI Tubo in	DI Tubo mm	Dash	Q Dim. Fl. mm	R Sp. Fl. mm	Q Dim. Fl. Dash	C Cut-off mm
19B810-12-12	3/4	19,0	12	41,3	9,0	12	57,0
19B810-16-12	3/4	19,0	12	47,6	9,5	16	62,5
19B810-12-16	1	25,4	16	41,3	9,0	12	62,5
19B810-16-16	1	25,4	16	47,6	9,5	16	65,5
19B810-20-16	1	25,4	16	54,0	10,5	20	75,5
19B810-16-20	1.1/4	31,8	20	47,6	9,5	16	70,0
19B810-20-20	1.1/4	31,8	20	54,0	10,5	20	72,0
19B810-24-20	1.1/4	31,8	20	63,5	12,5	24	83,5
19B810-20-24	1.1/2	38,1	24	54,0	10,5	20	73,0
19B810-24-24	1.1/2	38,1	24	63,5	12,5	24	85,5
19B810-32-24	1.1/2	38,1	24	79,5	12,5	32	101,5
19B810-24-32	2	50,8	32	63,5	12,5	24	88,0
19B810-32-32	2	50,8	32	79,5	12,5	32	104,5

POWERTRAK


SERIE 19B470: FLANGIA 45° 6000 SAE J 518 CODE 62

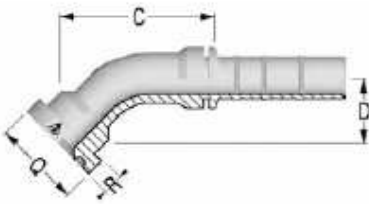

Codice	DI Tubo in	DI Tubo mm	Dash	Q Dim. Fl. mm	R Sp. Fl. mm	Q Dim. Fl. Dash	C Cut-off mm	D Drop mm
19B470-12-12	3/4	19,0	12	41,3	9,0	12	79,0	29,5
19B470-16-12	3/4	19,0	12	47,6	9,5	16	79,0	34,0
19B470-16-16	1	25,4	16	47,6	9,5	16	95,0	33,0
19B470-20-16	1	25,4	16	54,0	10,5	20	95,0	42,0
19B470-16-20	1.1/4	31,8	20	47,6	9,5	16	118,0	39,5
19B470-20-20	1.1/4	31,8	20	54,0	10,5	20	113,0	43,5
19B470-24-20	1.1/4	31,8	20	63,5	12,5	24	127,0	50,0
19B470-24-24	1.1/2	38,1	24	63,5	12,5	24	124,0	50,0
19B470-32-24	1.1/2	38,1	24	79,5	12,5	32	142,0	57,0
19B470-32-32	2	50,8	32	79,5	12,5	32	171,5	64,0

POWERTRAK


SERIE 19B480: FLANGIA 90° 6000 SAE J 518 CODE 62

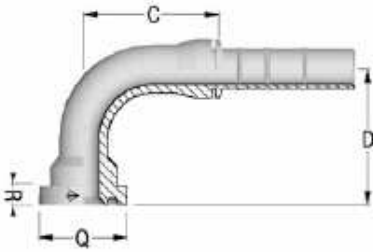

POWERTRAK

Codice	DI Tubo in	DI Tubo mm	Dash	Q Dim. Fl. mm	R Sp. Fl. mm	Q Dim. Fl. Dash	C Cut-off mm	D Drop mm
19B480-12-12	3/4	19,0	12	41,3	9,0	12	66,0	72,0
19B480-16-12	3/4	19,0	12	47,6	9,5	16	64,0	66,0
19B480-12-16	1	25,4	16	41,3	9,0	12	77,0	63,0
19B480-16-16	1	25,4	16	47,6	9,5	16	78,0	66,0
19B480-20-16	1	25,4	16	54,0	10,5	20	79,0	79,0
19B480-16-20	1.1/4	31,8	20	47,6	9,5	16	98,0	85,0
19B480-20-20	1.1/4	31,8	20	54,0	10,5	20	93,0	86,0
19B480-24-20	1.1/4	31,8	20	63,5	12,5	24	99,0	96,0
19B480-20-24	1.1/2	38,1	24	54,0	10,5	20	112,0	103,0
19B480-24-24	1.1/2	38,1	24	63,5	12,5	24	112,0	103,0
19B480-32-24	1.1/2	38,1	24	79,5	12,5	32	113,0	133,0
19B480-32-32	2	50,8	32	79,5	12,5	32	151,0	133,0


SERIE 19A650: FLANGIA 90° 6000 SAE J 518 CODE 62 - LONG DROP

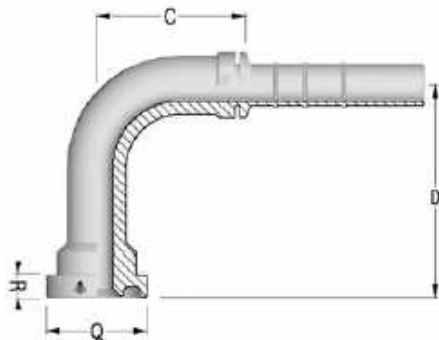

POWERTRAK

Codice	DI Tubo in	DI Tubo mm	Dash	Q Dim. Fl. mm	R Sp. Fl. mm	Q Dim. Fl. Dash	C Cut-off mm	D Drop mm
19A650-12-12	3/4	19,0	12	41,3	9,0	12	68,5	80,0
19A650-16-12	3/4	19,0	12	47,6	9,5	16	68,5	83,0
19A650-16-16	1	25,4	16	47,6	9,5	16	81,0	100,0
19A650-20-20	1.1/4	31,8	20	54,0	10,5	20	90,0	120,0


SERIE A19A26: FEMMINA ORFS

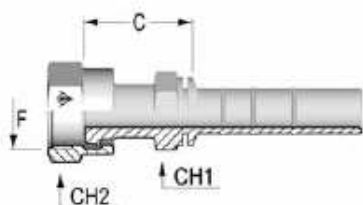

POWERTRAK

Codice	DI Tubo in	DI Tubo mm	Dash	F Filetto in-TPI	F Filetto mm	C Cut-off mm	CH1 mm	CH2 mm
A19A26-12-12	3/4	19,0	12	1"3/16-12	12	47,5	30,0	36,0
A19A26-16-12	3/4	19,0	12	1"7/16-12	16	49,5	36,0	41,0
A19A26-16-16	1	25,4	16	1"7/16-12	16	50,0	36,0	41,0
A19A26-20-16	1	25,4	16	1"11/16-12	20	51,0	41,0	50,0
A19A26-20-20	1.1/4	31,8	20	1"11/16-12	20	51,0	41,0	50,0
A19A26-24-24	1.1/2	38,1	24	2"-12	24	52,0	57,0	51,0


SERIE A19A27: FEMMINA 45° ORFS

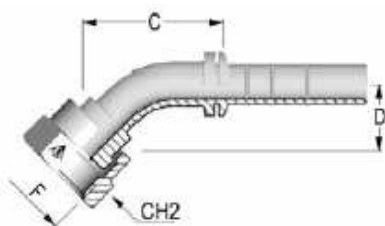

POWERTRAK

Codice	DI Tubo in	DI Tubo mm	Dash	F Filetto in-TPI	F Filetto Dash	C Cut-off mm	D Drop mm	CH2 mm
A19A27-12-12	3/4	19,0	12	1"3/16-12	12	68,0	23,0	36,0
A19A27-16-12	3/4	19,0	12	1"7/16-12	16	79,0	28,0	41,0
A19A27-16-16	1	25,4	16	1"7/16-12	16	79,0	28,0	41,0
A19A27-20-16	1	25,4	16	1"11/16-12	20	97,0	37,0	50,0
A19A27-20-20	1.1/4	31,8	20	1"11/16-12	20	97,0	37,0	50,0
A19A27-24-24	1.1/2	38,1	24	2"-12	24	115,3	48,9	57,0

SERIE A19A28: FEMMINA 90° ORFS

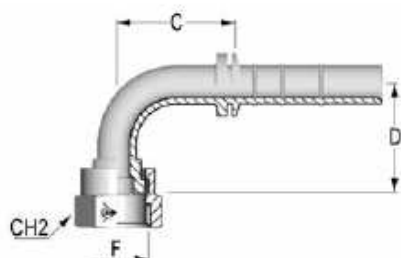

POWERTRAK

Codice	DI Tubo in	DI Tubo mm	Dash	F Filetto in-TPI	F Filetto Dash	C Cut-off mm	D Drop mm	CH2 mm
A19A28-12-12	3/4	19,0	12	1"3/16-12	12	62,5	49,0	36,0
A19A28-16-12	3/4	19,0	12	1"7/16-12	16	60,0	54,0	41,0
A19A28-16-16	1	25,4	16	1"7/16-12	16	72,5	56,0	41,0
A19A28-20-16	1	25,4	16	1"11/16-12	20	84,5	75,0	50,0
A19A28-20-20	1.1/4	31,8	20	1"11/16-12	20	88,0	75,0	50,0
A19A28-24-24	1.1/2	38,1	24	2"-12	24	105,0	99,7	57,0